

TECHNICAL DATASHEET #TD3100AX
24VDC/24VDC Converter
120 Watts
P/N: PSU1K

Isolated 24VDC power suitable for use with DeviceNet communications equipment or to protect sensitive electronics powered by a battery circuit...

- 24VDC to 24VDC Converter, 120 Watts
- 12VDC to 24VDC Converter, 95 Watts
- Input operating voltage range from 18 to 32VDC
- Conditioned output of 24VDC \pm 1%
- No minimum load requirement
- Switch mode operation delivers high efficiency
- Reverse polarity protection
- Input and output isolation
- Robust, rugged and highly reliable
- Compact size for ease of mounting in confined spaces
- Connects via a 4-pin plug with 2 meter lead wires
- Suitable for moist, high shock and vibration environments
- Operational from -40 to 70°C
- IP67 protection
- CE marked
- IT Class 2 - UL recognized to UL1950
- cUL recognized to CAN/CSA-C22.2 No. 950-95



Applications:

SCADA Systems
Remote Terminal Units (RTU)
Switchgear
Motor Control Centers

Charging/Cranking Battery Based Power Supply Systems
Power Conditioning for Controls & Instrumentation utilizing DeviceNet or other industrial networks
Off-Highway Equipment Control Systems
Marine Auxiliary and Propulsion Systems

These applications are found in a variety of industries including process industries, general manufacturing, electric utilities, oil & gas, water/wastewater and mobile equipment.

Description: The DC-DC Converter provides clean 24VDC power suitable for instrumentation and control networks or process equipment. For operation under the most harsh and demanding conditions, the unit is fully sealed and enclosed to protect against moisture, shock and vibration. Power from a battery or other source in the range of 18-32VDC is converted to a 24VDC output regulated to 1%. Input and output isolation is provided. The unit is designed with extremely rugged surge and transient suppression in addition to sustained over/under voltage protection. With a nominal nameplate rating of 120 Watts of output power, the DC-DC Converter has an efficiency rated at >90%.

Ordering Part Numbers:

Converter with Wire Harness KIT:

PSU1K (KIT SMP-BAC-V06-24VDC-01 Converter, WH-DT06-4S-S-16AWG-2M Wire Harness)


Items can also be ordered individually.

Converter: **SMP-BAC-V06-24VDC-01**

Mating Wire Harness, 2 m: **WH-DT06-4S-S-16AWG-2M**

Mating Plug Kit: **PL-DT06-4S**


Block Diagram

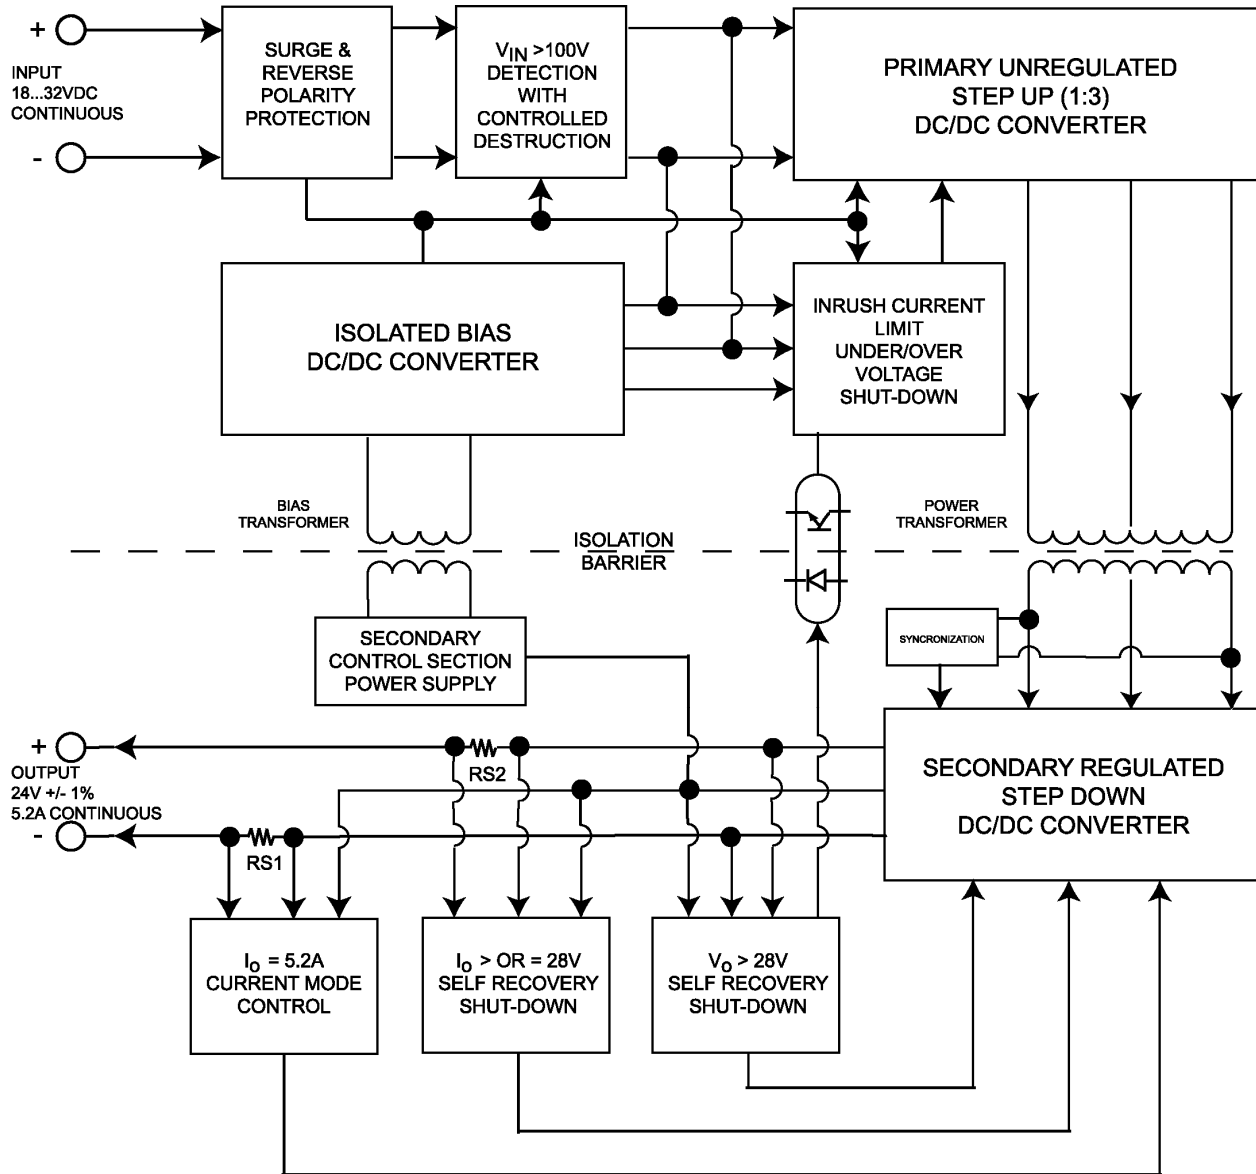

Technical Specifications:

All specifications are typical at nominal input voltage and 25 degrees C unless otherwise specified.

Input Specifications		Output Specifications	
Power Source	24 VDC or 12VDC	Nameplate Rating (Output Power)	With 24VDC input: 120 Watts nominal With 12VDC input: 95 Watts nominal
Operating Voltage Range	18 - 32VDC continuous	Output Current	With 24VDC input: 4.12/5.2A continuous With 12VDC input: 4A continuous
Maximum Input Current	14.4 ADC	Isolation	Isolated from input and chassis ground
Reverse Voltage Protection	Provided	Output Voltage	24VDC \pm 1%
Over-voltage Shutdown	33VDC	Output Voltage Ripple	V(RIPPLE) \leq 250 mVpp
Under-voltage Shutdown	7.5VDC	Turn-on Time (with full load)	250 msec max/5% of final value
Isolation	Isolated from output and chassis ground	Turn-on Overshoot	None
		Stability	Stable at all loads (no minimum load requirement)
		Transient Response	200mV/1.5ms (No Load to Full Load) 100mV/1ms (50% - 100% Load)
General Specifications			
Efficiency	>90%		
Operating Temperature	-40 to 70°C (-40 to 158°F)		
Storage Temperature	-50 to 85°C (-58 to 185°F)		
Humidity	0-99% relative humidity (non-condensing)		
EMC/EMI Compliance	Emissions EN 50081-2 Immunity EN 50082-2		
Agency approvals	IT Class 2 (UL Recognized to UL1950, CUL Recognized to CAN/CSA-C22.2 No. 950-95) Other approvals – CE		
Protection rating	IP67		
Shock	IEC 68-2-27 (30G/11ms)		
Vibration	IEC 68-2-64		
Electrical Connection	Deutsch IPD P/N: DT13-4P connector assembly mates to a wire harness comprised of a 4 pin plug (Deutsch IPD P/N:DT06-4S assembly) with 2 m (6.5 ft.) of 16 AWG unterminated lead wires P/N: WH-DT06-4S-S-16AWG-2M Pin out: Refer to page 4.		
Weight	1.4 kg (3.08 lbs.)		
Dimensions	5.50 x 6.93 x 2.37 inches 139.7 x 176.0 x 60.3 mm (W x L x H) excluding connector		
		Mechanical Dimensions	
		<p>The image contains two mechanical drawings of a rectangular component. The top drawing is the 'FRONT VIEW', showing a width of 4.102 inches [104.19 mm] and a height of 2.375 inches [60.32 mm]. A 'Ground Stud' is indicated on the left side. The bottom drawing is the 'BOTTOM VIEW', showing a total width of 5.500 inches [139.70 mm] and a total height of 7.68 inches [195.00 mm]. It shows a central section with a height of 4.724 inches [120.00 mm] and a width of 4.624 inches [117.46 mm]. Other dimensions include 6.93 inches [176.00 mm] for the top section, 6.771 inches [172.00 mm] for the bottom section, and 1.024 inches [26.00 mm] for a small offset. A hole diameter of 0.250 inches [6.35 mm] is also shown. A note at the bottom right states 'Dimensions: inches [mm]'.</p>	

Installation	
<p>Set up</p> <ol style="list-style-type: none"> 1. A maximum 30A fuse is recommended in the primary circuit to provide protection for the primary wiring. 2. Use four ¼-20 1 inch screws to mount the converter. 3. Ground the unit to chassis ground by attaching a ground strap and locking washer to the ground stud found on the housing. (See <i>mechanical drawing</i>.) 4. Snap the plug connector into the mating receptacle mounted on the converter. 5. Connect the wiring to power and output terminal blocks (provided by customer). 6. Once the load is ready to receive power, turn on the power source to the converter. 	 <p>Connector Pin Out</p> <ul style="list-style-type: none"> 1 Output + (red/white) 2 Output - (black/white) 3 Power - (black) 4 Power + (red)
<p>Grounding</p>	<p>Protective Earth (PE) must be connected to the grounding stud to reduce the risk of electric shock. The conductor providing the connection should have a ring lug and wire larger than or equal to 4 mm² (12 AWG). The ring lug should be placed between the nut and a star washer. (To secure the ground strap, use an 8-32 “K-LOK” locknut, stainless steel, 3/8” O.D.)</p> <p>All chassis grounding should go to a single ground point designated for the machine and all related equipment.</p> <p>The ground strap that provides a low impedance path for EMI should be a ½ inch wide, flat, hollow braid, no more than 12 inches long with a suitable sized ring lug for the module’s grounding lug. It may be used in place of the PE grounding conductor and would then perform both PE and EMI grounding functions.</p>
<p>Mounting</p>	<p>Mounting ledges include holes sized for ¼ inch or M6 bolts. The bolt length will be determined by the end-user’s mounting plate thickness. Typically ¾ inch (20 mm) is adequate.</p> <p>If the module is mounted without an enclosure, it should be mounted vertically with connectors facing left and right to reduce likelihood of moisture entry.</p> <p>All field wiring should be suitable for the operating temperature range of the module.</p> <p>Install the unit with appropriate space available for servicing and for adequate wire harness access (6 inches or 15 cm) and strain relief (12 inches or 30 cm).</p>
<p>Configuration</p>	<ul style="list-style-type: none"> • The converters can be installed in parallel to provide an output greater than the limit of one unit. Ensure all units are grounded. • For an inversion of the output, connect the +ve output pin to the load’s –ve point and the –ve output pin to the load +ve point.

Specifications are indicative and subject to change. Actual performance will vary depending on the application and operating conditions. Users should satisfy themselves that the product is suitable for use in the intended application. All our products carry a limited warranty against defects in material and workmanship. Please refer to our Warranty, Application Approvals/Limitations and Return Materials Process as described on www.axiomatic.com/service.html. Form: TD3100AX-07/23/10

©2010 Axiomatic Technologies Corporation