

4-20 mA to Current Converter

P/N: IC-DR-XX and AX130300

Where xx = 11 (0-200 mA output)
 12 (20 – 160 mA output)
 14 (0-50 mA output)
 20 (0-100 mA output)
 24 (0-160 mA output)
 25 (20-200 mA output)
 AX130300 (5-195 mA output)

Description: The Current Converter accepts a 24VDC power supply (nominal) and a 4-20mA input signal converting it to a current output. Various outputs are available, including 0-200 mA, 20-200 mA, 5-195 mA, 0-100 mA, 20-160 mA, 0-160 mA or 0-50 mA. Span and zero is user adjustable. A diagnostic LED indicates operational status, glowing green when the load, input signal and power supply are connected. The load should be floating, isolated from ground. The circuit board is conformal coated and the unit is available in a 35 mm DIN rail mount housing.



Application:

Industrial automation
 Power generation controls

Technical Specifications:

Typical at nominal input voltage and 25 degrees C unless otherwise specified

Ordering Part Number:	IC-DR-xx 4-20 mA to Current Converter Where xx = Output current default setting xx = 11 (0-200mA output) xx = 12 (20-160mA output) xx = 14 (0-50 mA output) xx = 20 (0-100 mA output) xx = 24 (0-160 mA output) xx = 25 (20-200 mA output) AX130300: 4-20 mA input, 5-195 mA output
Input Specifications:	
Current Input	4-20mA
Output Specifications:	
Current Output	Factory settings +/- 2mA : IC-DR-11 = 0-200mA IC-DR-12 = 20-160 mA IC-DR-14 = 0-50 mA IC-DR-20 = 0-100 mA IC-DR-24 = 0-160 mA IC-DR-25 = 20-200 mA AX130300 = 5-195 mA (Other current output ranges are available on request.) Connect output to Output positive terminal and not to GND.
Response Time	<5 mSec.

Axiomatic Technologies Corporation

5915 Wallace Street, Mississauga, Ontario Canada L4Z 1Z8
 TEL: (905) 602-9270 x225 FAX: (905) 602-9279 E-mail: sales@axiomatic.com
www.axiomatic.com


<i>Non-linearity</i>	<0.1% without adjustments performed
General Specifications:	
<i>Power Supply</i>	24VDC nominal (9-45VDC operating range) Transient protection is provided.
<i>Power Consumption</i>	550 milliwatts All measurements taken at 24VDC, full output current (max.).
<i>Reverse Polarity Protection</i>	Provided
<i>Operating Conditions</i>	-40 to 85 degrees C (-40 to 185 degrees F)
<i>Electrical Connection</i>	Screw terminals accept 14-24 AWG wire
<i>Enable (enables output through closing a mechanical relay contact)</i>	To enable operation, externally short terminals 1 and 3.
<i>Packaging and Dimensions (W x H x D)</i>	DR12, 16 Amp max. current rating, Polycarbonate DIN rail mount (75 x 98.5 x 22.5 mm or 2.95 x 3.88 x 0.89 inches) for high profile DIN rail (35 mm)
<i>Protection</i>	PCB conformal coated IP40 rated housing, Terminals rated at IP20
<i>Weight</i>	0.25 lbs. (0.11 kg)

Adjustments:	<i>Multi-turn trim pots (10 turns)</i>
<i>Zero</i>	CW = increasing Apply 4mA input current and adjust the Zero trimpot to desired minimum output current. Refer to the chart below. Factory settings are listed below.
<i>Span</i>	CW = increasing Apply 20mA input current and adjust the Span trimpot to desired maximum current output. Refer to the chart below. Factory settings are listed below.

CW = clockwise, CCW = counter clockwise

Default Current Outputs and Adjustment Ranges:

MODELS	IOUT MIN RANGE		IOUT MAX RANGE		DEFAULT	
	MIN [mA]	MAX [mA]	MIN [mA]	MAX [mA]	MIN [±2 mA]	MAX [±2 mA]
IC-DR-11	0	25	155	220	0	200
IC-DR-12	6	29	116	171	20	160
IC-DR-14	0	5	38	63	0	50
IC-DR-20	0	12	69	105	0	100
IC-DR-24	0.14	43.46	143	172	0	160
IC-DR-25	0	25	155	220	20	200
AX130300	0	25	155	220	15	195

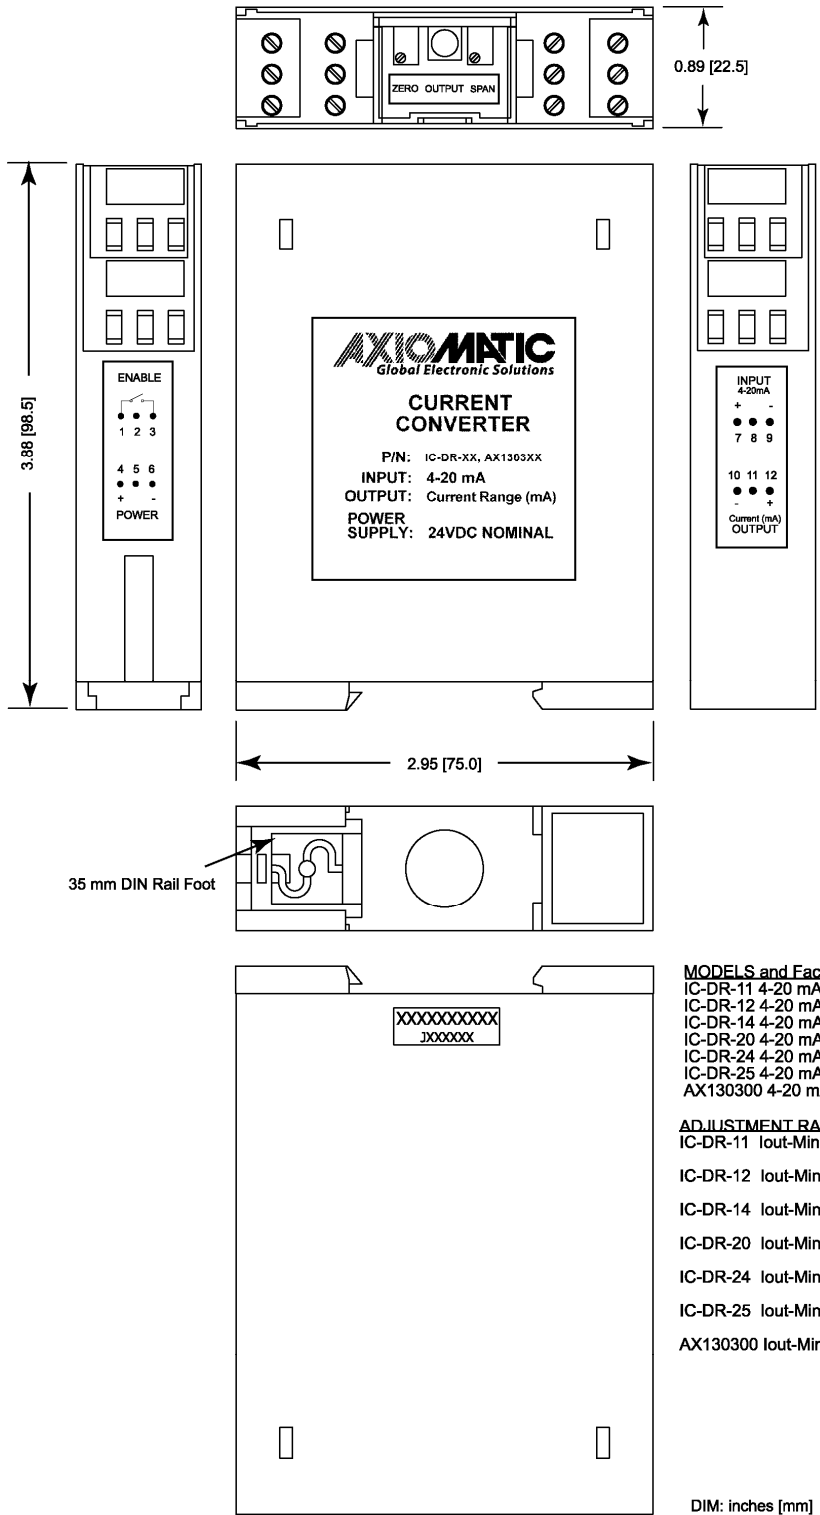

MODELS and Factory Default Settings (+/- 2 mA):

- IC-DR-11 4-20 mA to 0-200 mA
- IC-DR-12 4-20 mA to 20-160 mA
- IC-DR-14 4-20 mA to 0-50 mA
- IC-DR-20 4-20 mA to 0-100 mA
- IC-DR-24 4-20 mA to 0-160 mA
- IC-DR-25 4-20 mA to 20-200 mA
- AX130300 4-20 mA to 5-195 mA

ADJUSTMENT RANGES (Iout Min and Max):

- IC-DR-11 Iout-Min 0-25 mA Iout-Max 155-220 mA
- IC-DR-12 Iout-Min 6-29 mA Iout-Max 116-171 mA
- IC-DR-14 Iout-Min 0-5 mA Iout-Max 38-63 mA
- IC-DR-20 Iout-Min 0-12 mA Iout-Max 69-105 mA
- IC-DR-24 Iout-Min 0.14-43.46 mA Iout-Max 143-172 mA
- IC-DR-25 Iout-Min 0-25 mA Iout-Max 155-220 mA
- AX130300 Iout-Min 0-25 mA Iout-Max 155-220 mA

DIM: inches [mm]

IC-DR-11,12,14,20,24,25, AX130300
 June 6, 2010 A. Wilkins
 Axiomatic Technologies Corporation

Specifications are indicative and subject to change. Actual performance will vary depending on the application and operating conditions. Users should satisfy themselves that the product is suitable for use in the intended application. All our products carry a limited warranty against defects in material and workmanship. Please refer to our Warranty, Application Approvals/Limitations and Return Materials Process as described on www.axiomatic.com/service.html.

Form: TD2300AX-06/08/10