

## 3 Encoder, 7 Signal Inputs CAN Controller

3 Encoder, 1 Universal Signal, 6 Digital/PWM/Hz Inputs  
CANopen®

P/N: AX030141

### Features:

- 1 user selectable universal signal input:
  - 0-5 V
  - 0-10 V
  - 0-20 mA
  - 4-20 mA
  - PWM (low or high frequency)
  - Frequency/RPM
  - Counter
  - Digital
- 4 user selectable digital signal inputs:
  - PWM (low or high frequency)
  - Frequency/RPM
  - Digital
- 2 digital inputs
- 3 encoder inputs (A and B signal)
- 3-way isolation between inputs, power and CAN
- 12V, 24V, 48 Vdc (nominal) power input
- CANopen®
- Rugged packaging and connectors (TE Deutsch)
- Standard control logic
- CE mark (EMC Directive)



**Description:** The 3 Encoder, 7 Signal Input Module accepts up to 3 encoders; 1 analog or digital type signal inputs (0-5V, 0-10V, 0-20 mA or 4-20 mA, Digital, PWM, Frequency/RPM or Counter); 4 digital type signal inputs (Digital, PWM, Frequency/RPM) and 2 Digital inputs. The modules can be connected to a variety of analog machine sensors or levers, PLC's, switches, PWM signals, etc. It interfaces with the machine's CAN network (CANopen®). Standard embedded software is provided. Rugged IP67 rated packaging in addition to a wide-ranging power supply input section for 12V, 24V or 48Vdc power suits applications in the harsh environment of mobile equipment with on-board battery power. All setpoints are user configurable.

**Applications:** The controller is designed to meet the rugged demands of construction equipment, power generator sets, and industrial machine control applications.

### Ordering Part Numbers:


Model P/N	Fieldbus
AX030141	CANopen

#### Accessories:

**PL-DTM06-12SA-12SB** Mating Plug Kit (1 DTM06-12S, DTM06-12SB, 2 WM12S, 24 contacts)

#### EDS File

# BLOCK DIAGRAM

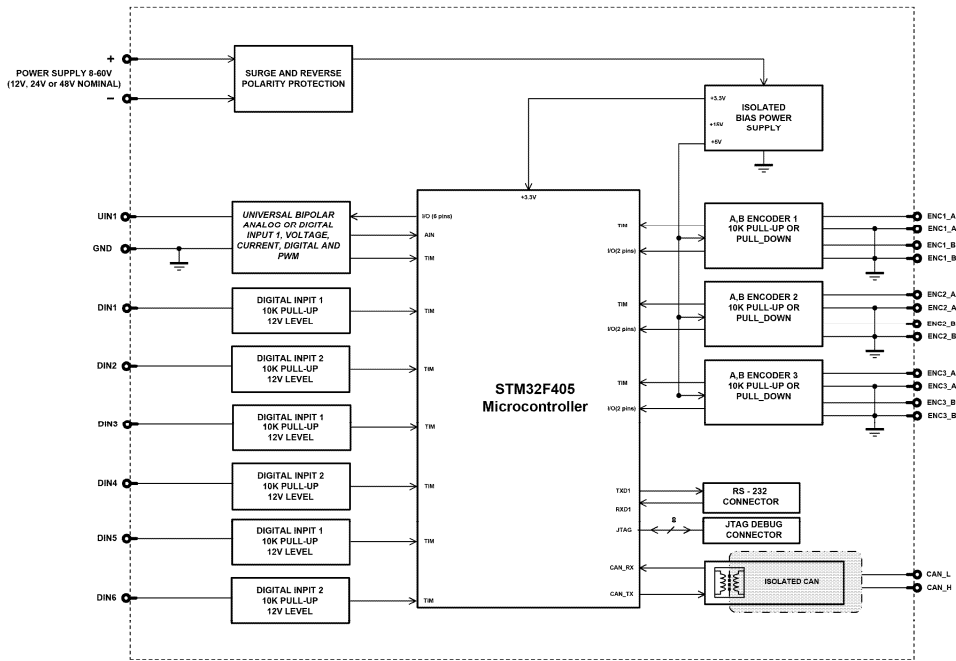

## Technical Specifications:

Specifications are indicative and subject to change. Actual performance will vary depending on the application and operating conditions. Users should satisfy themselves that the product is suitable for use in the intended application. All our products carry a limited warranty against defects in material and workmanship. Please refer to our Warranty, Application Approvals/Limitations and Return Materials Process as described on [www.axiomatic.com/service.html](http://www.axiomatic.com/service.html).

## Power Input Specifications

Power Supply Input - Nominal	12, 24 or 48Vdc nominal operating voltage 8...60 Vdc power supply range for voltage transients
Surge Protection	Provided
Reverse Polarity Protection	Provided
Quiescent Current	55 mA @ 12Vdc; 28 mA @ 24Vdc Typical

## Signal Input Specifications


Encoder Inputs	Three 2-phase, phase A and B incremental encoder inputs Range: 0.5 to 60 kHz (preliminary) Amplitude: up to +Vps 1 MOhm impedance or Active High with 10K Pullup or Active Low with 10K Pulldown resistor to GND
----------------	---

Universal Input	<p>1 user selectable input</p> <ul style="list-style-type: none"> <li>Analog 12-bit (0-5V, 0-10V, 0-20 mA, 4-20 mA)</li> <li>PWM 12-bit (low or high frequency) – auto detect 0.5 to 50 kHz, 0-100%</li> <li>Frequency/RPM – auto detect 0.5 to 50 kHz, 0-100%</li> <li>Counter input 16-bit</li> <li>Digital (active high/active low) [ON when input <math>\geq</math> 1.5V]</li> </ul> <p>The “<b>Input Sensor Type</b>” setpoint is used to configure input type. All inputs with the exception of 16-Bit Counter are sampled every 1ms. Analog Input types have a 12-bit resolution. With current inputs, short circuit protection is provided.</p>																																												
Digital Inputs 1-6	<p>4 user selectable inputs</p> <ul style="list-style-type: none"> <li>PWM 12-bit (low or high frequency)</li> <li>Frequency/RPM auto detect 0.5 to 50 kHz, 0-100%</li> <li>Digital (active high with 10K pullup) [ON when input <math>\geq</math> 1.5V]</li> </ul> <p>2 digital inputs (inputs 3 and 6)</p> <ul style="list-style-type: none"> <li>Digital (active high with 10K pullup) [ON when input <math>\geq</math> 1.5V]</li> </ul>																																												
Minimum and Maximum Ratings	<table border="1" data-bbox="613 680 1214 1024"> <thead> <tr> <th colspan="4">Table 1.0. Absolute Maximum and Minimum Ratings</th> </tr> <tr> <th>Characteristic</th> <th>Min</th> <th>Max</th> <th>Units</th> </tr> </thead> <tbody> <tr> <td>Power Supply</td> <td>8</td> <td>60</td> <td>V dc</td> </tr> <tr> <td>Voltage Input</td> <td>0</td> <td>43</td> <td>V dc</td> </tr> <tr> <td>Current Input</td> <td>0</td> <td>21</td> <td>mA</td> </tr> <tr> <td>Current Input – Voltage Level</td> <td>0</td> <td>12</td> <td>Vdc</td> </tr> <tr> <td>Digital Type Input – Voltage Level</td> <td>0</td> <td>43</td> <td>Vdc</td> </tr> <tr> <td>PWM Duty Cycle</td> <td>0</td> <td>100</td> <td>%</td> </tr> <tr> <td>PWM Frequency</td> <td>50</td> <td>20 000</td> <td>Hz</td> </tr> <tr> <td>PWM Voltage pk - pk</td> <td>0</td> <td>43</td> <td>V dc</td> </tr> <tr> <td>RPM Frequency</td> <td>50</td> <td>20 000</td> <td>Hz</td> </tr> </tbody> </table>	Table 1.0. Absolute Maximum and Minimum Ratings				Characteristic	Min	Max	Units	Power Supply	8	60	V dc	Voltage Input	0	43	V dc	Current Input	0	21	mA	Current Input – Voltage Level	0	12	Vdc	Digital Type Input – Voltage Level	0	43	Vdc	PWM Duty Cycle	0	100	%	PWM Frequency	50	20 000	Hz	PWM Voltage pk - pk	0	43	V dc	RPM Frequency	50	20 000	Hz
Table 1.0. Absolute Maximum and Minimum Ratings																																													
Characteristic	Min	Max	Units																																										
Power Supply	8	60	V dc																																										
Voltage Input	0	43	V dc																																										
Current Input	0	21	mA																																										
Current Input – Voltage Level	0	12	Vdc																																										
Digital Type Input – Voltage Level	0	43	Vdc																																										
PWM Duty Cycle	0	100	%																																										
PWM Frequency	50	20 000	Hz																																										
PWM Voltage pk - pk	0	43	V dc																																										
RPM Frequency	50	20 000	Hz																																										
Input Accuracy	<table border="1" data-bbox="613 1043 1295 1291"> <thead> <tr> <th colspan="3">Table 2.0. Input Accuracy</th> </tr> <tr> <th>Input Type</th> <th>Accuracy</th> <th>Resolution</th> </tr> </thead> <tbody> <tr> <td>Voltage</td> <td>+/- 1%</td> <td>1 [mV]</td> </tr> <tr> <td>Current</td> <td>+/- 1%</td> <td>1 [uA]</td> </tr> <tr> <td>PWM</td> <td>+/- 1% (&lt;5kHz) +/- 2% (&gt;5kHz)</td> <td>0.1 [%]</td> </tr> <tr> <td>Frequency/RPM</td> <td>+/- 1%</td> <td>0.01 [Hz]</td> </tr> </tbody> </table>	Table 2.0. Input Accuracy			Input Type	Accuracy	Resolution	Voltage	+/- 1%	1 [mV]	Current	+/- 1%	1 [uA]	PWM	+/- 1% (<5kHz) +/- 2% (>5kHz)	0.1 [%]	Frequency/RPM	+/- 1%	0.01 [Hz]																										
Table 2.0. Input Accuracy																																													
Input Type	Accuracy	Resolution																																											
Voltage	+/- 1%	1 [mV]																																											
Current	+/- 1%	1 [uA]																																											
PWM	+/- 1% (<5kHz) +/- 2% (>5kHz)	0.1 [%]																																											
Frequency/RPM	+/- 1%	0.01 [Hz]																																											
Input Impedance	<p>0-5V: 1 MOhm 0-10V: 170 kOhm 0(4)-20mA: 249 Ohm Frequency/Digital Input: Pull Up/Pull Down 1 MOhm</p>																																												
Scan Rate	<p>Each input is scanned in 100uS. A complete scan of 10 inputs occurs with new measured values every 1mS.</p>																																												
Analog GND	<p>1 Analog GND connections is provided.</p>																																												

## General Specifications

Microprocessor	STM32F405RG
Isolation	3-way isolation between inputs, power and CAN 400 Vrms
Communications	1 CAN port (CANopen®)  A SAE J1939 model is available, ordering part number AX030140. Auto baud rate detection allows for high speed SAE J1939 CAN bus connections.
EMC Compliance	CE marking
Vibration	MIL-STD-202G, Method 204D, test condition A – 10 g peak (Sine) MIL-STD-202G, Method 214A, test condition B – 7.68 Grms (Random)
Shock	MIL-STD-202G, Method 213B, test condition A 50 g half sine pulse, 6 ms, 6 pulses per axis
User Interface	User configuration and diagnostics are provided by any CANopen service tool (not supplied).
Network Termination	It is necessary to terminate the network with external termination resistors. The resistors are 120 Ohm, 0.25W minimum, metal film or similar type. They should be placed between CAN_H and CAN_L terminals at both ends of the network.
Control Logic	Refer to the User Manual UMAX030141 for details. The AX030141 can be upgraded with new application firmware over the CAN bus using the Electronic Assistant. <i>For application-specific control logic, contact Axiomatic.</i>
Electrical Connections	TE Deutsch DTM series 24 pin receptacle (DTM13-12PA-12PB-R008) Mating plug: TE Deutsch DTM06-12SA and DTM06-12SB with 2 wedgelocks (WM12S) and 24 contacts (0462-201-20141). 20 AWG wire is recommended for use with contacts 0462-201-20141. Refer to Table 3.0 for pinout.
Enclosure and Dimensions	High Temperature Nylon housing – TE Deutsch PCB Enclosure (EEC-325X4B) 4.63 x 5.25 x 1.41 inches 117.60 x 133.50 x 35.90 mm (W x L x H excluding mating plugs)
Operating Conditions	-40 to 85°C (-40 to 185°F)
Weight	0.55 lb. (0.25 kg)
Protection	IP67, Unit is conformal coated in the housing.
Mounting	Mounting holes sized for ¼ inch or M6 bolts. The bolt length will be determined by the end-user's mounting plate thickness. The mounting flange of the controller is 0.63 inches (16 mm) thick. If the module is mounted without an enclosure, it should be mounted vertically with connectors facing left and right to reduce likelihood of moisture entry. The CAN wiring is considered intrinsically safe. The power wires are not considered intrinsically safe and so in hazardous locations, they need to be located in conduit or conduit trays at all times. The module must be mounted in an enclosure in hazardous locations for this purpose.  All field wiring should be suitable for the operating temperature range.  Install the unit with appropriate space available for servicing and for adequate wire harness access (6 inches or 15 cm) and strain relief (12 inches or 30 cm).

## Dimensions and Typical Connections:

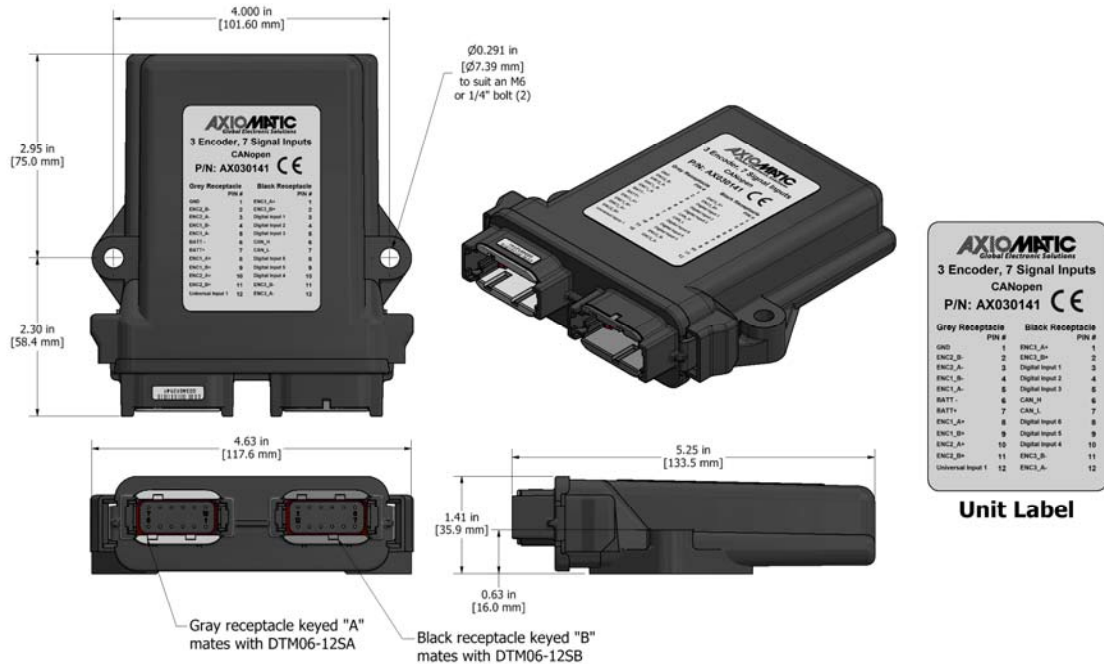

Grey Connector		Black Connector	
Pin #	Function	Pin #	Function
1	Analog GND	1	ENC3_A+
2	ENC2_B-	2	ENC3_B+
3	ENC2_A-	3	Digital Input 1
4	ENC1_B-	4	Digital Input 2
5	ENC1_A-	5	Digital Input 3 (Digital only)
6	Batt -	6	CAN_H
7	Batt +	7	CAN_L
8	ENC1_A+	8	Digital Input 6 (Digital only)
9	ENC1_B+	9	Digital Input 5
10	ENC2_A+	10	Digital Input 4
11	ENC2_B+	11	ENC3_B-
12	Universal Input	12	ENC3_A-

### Notes:

CANopen® is a registered community trademark of CAN in Automation e.V.

Form: TDAX030141-09/03//20