

TECHNICAL DATASHEET #TDAX080400  
**24 to 26V DC Converter**  
**P/N: AX080400**

*Clean isolated 26VDC power in a rugged package...*

- 24 to 26V DC Converter
- Input operating voltage range from 11 to 32VDC
- Conditioned output of 26VDC  $\pm$  1%, 5A
- 130 Watts power rating
- No minimum load requirement
- Switch mode operation delivers high efficiency
- Reverse polarity protection
- Input and output isolation
- Robust, rugged and highly reliable
- Compact size for ease of mounting in confined spaces
- Connects via a 4-pin plug with 2 meter lead wires
- Suitable for moist, high shock and vibration environments
- Current limiting for operating in parallel
- Operational from -40 to 70°C
- IP67 protection



Wire Harness

**Applications:**

SCADA Systems

Remote Terminal Units (RTU)

Switchgear

Motor Control Centers

Charging/Cranking Battery Based Power Supply Systems

Power Conditioning for Controls & Instrumentation Off-Highway

Equipment Control Systems

Marine Auxiliary and Propulsion Systems

These applications are found in a variety of industries including process industries, general manufacturing, electric utilities, oil & gas, water/wastewater and mobile equipment.

**Description:** The DC-DC Converter provides clean 26VDC power suitable for instrumentation and control networks or process equipment. For operation under the most harsh and demanding conditions, the unit is fully sealed and enclosed to protect against moisture, shock and vibration. Power from a battery or other source in the range of 11-32VDC is converted to a 26VDC output regulated to 1%. Input and output isolation is provided. The unit is designed with extremely rugged surge and transient suppression in addition to sustained over/under voltage protection. With a nominal nameplate rating of 130 Watts of output power, the DC-DC Converter has an efficiency rated at >90%.

**Ordering Part Numbers:**

Converter with Wire Harness KIT:

**AX080400K** (KIT AX080400 Converter, WH-DT06-4S-S-16AWG-2M Wire Harness)

Items can also be ordered individually.

Converter: **AX080400**

Mating Wire Harness, 2 m: **WH-DT06-4S-S-16AWG-2M**

Mating Plug Kit: **PL-DT06-4S**

**In Europe:**

**Axiomatic Technologies Oy**  
Höytämöntie 6  
33880 LEMPÄÄLÄ - Finland  
Tel. +358 3 3595 600  
Fax. +358 3 3595 660  
[www.axiomatic.fi](http://www.axiomatic.fi)


**In North America:**

**Axiomatic Technologies Corporation**  
5915 Wallace Street  
Mississauga, ON Canada L4Z 1Z8  
Tel. 1 905 602 9270  
Fax. 1 905 602 9279  
[www.axiomatic.com](http://www.axiomatic.com)

## Technical Specifications:

All specifications are typical at nominal input voltage and 25 degrees C unless otherwise specified.

### BLOCK DIAGRAM

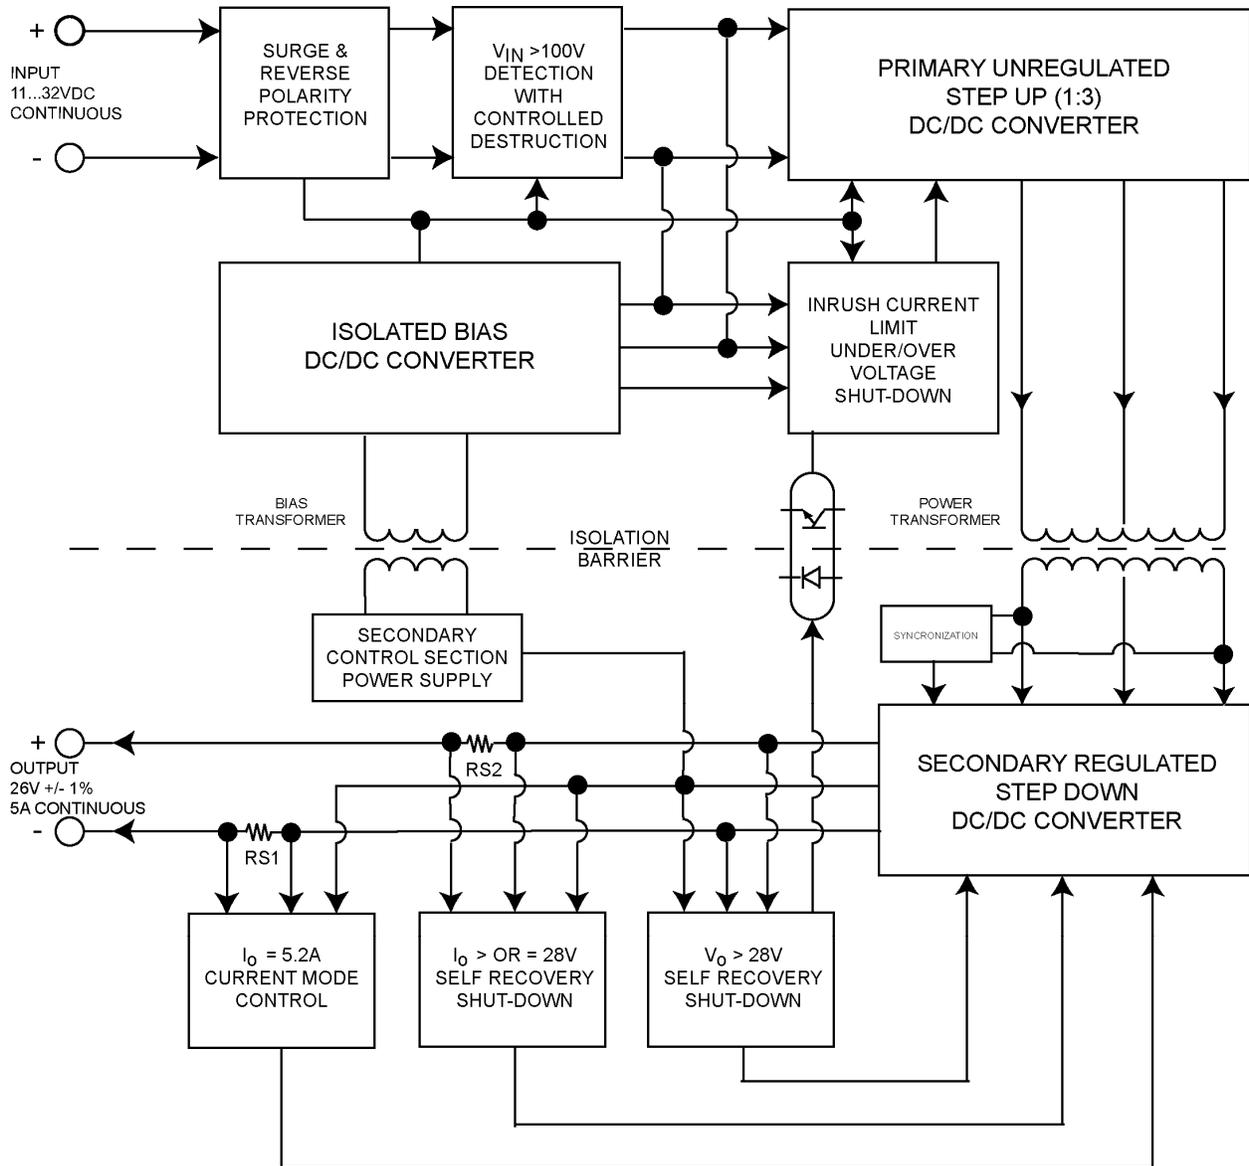

Input Specifications		Output Specifications	
Power Source	24 VDC	Nameplate Rating (Output Power)	130 Watts
Operating Voltage Range	11 - 32VDC continuous	Output Current	5A continuous
Maximum Input Current	14.4 ADC	Current Limit	5.2A
Reverse Voltage Protection	Provided	Output Voltage	26VDC $\pm$ 1%
Over-voltage Shutdown	33VDC	Output Voltage Ripple	V(RIPPLE) $\leq$ 250 mVpp
Under-voltage Shutdown	7.5VDC	Turn-on Time (with full load)	250 msec max/5% of final value
		Turn-on Overshoot	None
		Stability	Stable at all loads (no minimum load requirement)
		Transient Response	200mV/1.5ms (No Load to Full Load) 100mV/1ms (50% - 100% Load)
		Short Circuit Current	Protection provided Self recovery 5.4A current limit
General Specifications			
Isolation	Isolated from input, output and chassis ground 500V between primary and secondary		
Efficiency	>90%		
Operating Temperature	-40 to 70°C (-40 to 158°F)		
Storage Temperature	-50 to 85°C (-58 to 185°F)		
Humidity	0-99% relative humidity (non-condensing)		
Protection rating	IP67		
Electrical Connection	Deutsch IPD P/N: DT13-4P  Axiomatic Wire Harness: P/N: WH-DT06-4S-S-16AWG-2M (comprised of a 4 pin plug Deutsch IPD P/N:DT06-4S assembly with 2 m (6.5 ft.) of 16 AWG unterminated lead wires)  Pin out: Refer to page 4.		
Weight	Converter: 2.02 kg (4.45 lbs.) Converter + Wire Harness: 2.20 kg (4.85 lbs.)		
Packaging and Dimensions	Aluminum enclosure Encapsulated 5.50 x 6.93 x 2.37 inches 139.7 x 176.0 x 60.3 mm (W x L x H excluding connector)		


**FRONT VIEW**

Dimensions: 4.102 [104.19] (width), 2.375 [60.32] (height), 5.500 [139.70] (total width), 0.528 [13.42] (stud height), 0.347 [8.82] (stud offset).

**BOTTOM VIEW**

Dimensions: 6.93 [176.00] (total height), 6.771 [172.00] (height to top of enclosure), 4.624 [117.46] (width), 1.024 [26.00] (width to center of hole), 7.68 [195.00] (height to center of hole), 4.724 [120.00] (height to bottom of hole),  $\phi 0.250 [\phi 6.35]$  (hole diameter).

Dimensions: inches [mm]

<b>Installation</b>	
<p><b>Set up</b></p> <ol style="list-style-type: none"> <li>1. A maximum 30A fuse is recommended in the primary circuit to provide protection for the primary wiring.</li> <li>2. Use four ¼-20 1 inch screws to mount the converter.</li> <li>3. Ground the unit to chassis ground by attaching a ground strap and locking washer to the ground stud found on the housing. (See <i>mechanical drawing.</i>)</li> <li>4. Snap the plug connector into the mating receptacle mounted on the converter.</li> <li>5. Connect the wiring to power and output terminal blocks (provided by customer).</li> <li>6. Once the load is ready to receive power, turn on the power source to the converter.</li> </ol>	 <p><b>Connector Pin Out</b></p> <ul style="list-style-type: none"> <li>1 Output + (red/white)</li> <li>2 Output - (black/white)</li> <li>3 Power - (black)</li> <li>4 Power + (red)</li> </ul>
<p><b>Grounding</b></p>	<p>Protective Earth (PE) must be connected to the grounding stud to reduce the risk of electric shock. The conductor providing the connection should have a ring lug and wire larger than or equal to 4 mm<sup>2</sup> (12 AWG). The ring lug should be placed between the nut and a star washer. (To secure the ground strap, use an 8-32 “K-LOK” locknut, stainless steel, 3/8” O.D.)</p> <p>All chassis grounding should go to a single ground point designated for the machine and all related equipment.</p> <p>The ground strap that provides a low impedance path for EMI should be a ½ inch wide, flat, hollow braid, no more than 12 inches long with a suitable sized ring lug for the module’s grounding lug. It may be used in place of the PE grounding conductor and would then perform both PE and EMI grounding functions.</p>
<p><b>Mounting</b></p>	<p>Mounting ledges include holes sized for ¼ inch or M6 bolts. The bolt length will be determined by the end-user’s mounting plate thickness. Typically ¾ inch (20 mm) is adequate.</p> <p>If the module is mounted without an enclosure, it should be mounted vertically with connectors facing left and right to reduce likelihood of moisture entry.</p> <p>All field wiring should be suitable for the operating temperature range of the module.</p> <p>Install the unit with appropriate space available for servicing and for adequate wire harness access (6 inches or 15 cm) and strain relief (12 inches or 30 cm).</p>

*Specifications are indicative and subject to change. Actual performance will vary depending on the application and operating conditions. Users should satisfy themselves that the product is suitable for use in the intended application.*

*All our products carry a limited warranty against defects in material and workmanship. Please refer to our Warranty, Application Approvals/Limitations and Return Materials Process as described on [www.axiomatic.com/service.html](http://www.axiomatic.com/service.html).*

Form: TDAX080400-05/02/12

©2012 Axiomatic Technologies Corporation