Preliminary
TECHNICAL DATASHEET #TDAX081850

24Vdc/24Vdc Non-isolated Converter

9-36 Vdc Input
24Vdc, 720W Output
P/N: AX081850

Features

- 9-36Vdc/24Vdc, 720 W
- Operates from 9 Vdc to 36 Vdc with output current derating for input voltage less than 12 Vdc.
- Typical efficiency of 95%
- Input inrush current limit
- Thermal protection for over temperature
- Reverse battery, over and under-voltage protection
- Short circuit and overcurrent protection
- -40 to 70 °C (-40 to 158 °F) operating temperature with derating for input less than 17 Vdc
- IP67 protection rating
- 1 TE Deutsch DT13-12P type connector and 1 TE Deutsch DT13-6P type connector
- EMI/EMC compliant
- SAE J1455 and SAE J1113 compliant
- Suitable for engine cranking and load dump

Applications

The DC/DC converter is suitable for application on charging/cranking battery based systems.

- Off-highway Equipment
- Power generator set control systems
- Oilfield equipment
- Telecom

Ordering Part Numbers

24Vdc/24Vdc, 720W, Non-Isolated DC/DC Converter P/N: **AX081850**

Accessories:
12-pin Mating Wire Harness, 2 m: **AX070158**
6-pin Mating Wire Harness, 2 m: **AX070154**

To purchase the Converter and mating wire harnesses as a KIT (AX081850 converter, AX070158 and AX070154 wire harnesses), the ordering P/N is **AX081850K**.

Axiomatic Technologies Corporation
1445 Courtneypark Dr. E.
Mississauga, ON CANADA L5T 2E3
Tel: +1 (905) 602-9270
sales@axiomatic.com
www.axiomatic.com

Axiomatic Technologies Inc.
39100 Country Club Drive, Suite 400
Farmington Hills, MI USA 48331
Tel: +1 (734) 262-8535
sales@axiomatic.com
www.axiomatic.com

Axiomatic Technologies Oy
Höytämöntie 6 C
33880 Lempäälä, FINLAND
Tel: +358 103 375 750
salesfinland@axiomatic.com
www.axiomatic.fi

Technical Specifications

All specifications are typical at nominal input voltage and 25 °C unless otherwise specified.

Specifications are indicative and subject to change. Actual performance will vary depending on the application and operating conditions. Users should satisfy themselves that the product is suitable for use in the intended application. All our products carry a limited warranty against defects in material and workmanship. Please refer to our Warranty, Application Limitations & Return Materials Process as described on https://www.axiomatic.com/service/.

Input Specifications		**Output Specifications**	
Power Source	24 Vdc nominal	Nameplate Rating (Output Power)	720 VA nominal
Operating Voltage Range*	12 to 36 Vdc provides output regulated to 2% @ 30 A load For input< 12V, refer to Figure 1.0.	Output Current (DC)	30 A continuous For derating current for input < 12Vdc, refer to Figure 1.0.
Maximum Input Current	65ADC @ 12Vdc	Output Voltage	24 Vdc ± 2% Refer to Figure 1.0.
Load Dump	Designed to meet load dump conditions	Output Voltage Ripple	$V_{O(RIPPLE)} \leq$ 100 mVpp
Reverse Voltage Protection	Provided	Turn-on time (at full load)	500 ms typical
Under-voltage Shutdown	7Vdc typical	Stability	Stable at all loads (no minimum load requirement)
Over-voltage Shutdown	40 Vdc typical	Transient Response	700 mV/1 ms (25%-75% Load)
		Short Circuit Current	Protection provided Self-recovery 35A current limit

General Specifications

Compliance	Designed to meet the requirements of SAE J1455 and SAE J1113
Efficiency	95% (Refer to Figure 2.0.)
Enclosure	Cast Aluminum housing, integral gasket and connector 7.96 in x 11.12 in x 3.11 in (202 mm x 282 mm x 79 mm) L x W x H including integral connectors Refer to the dimensional drawing, Figure 2.0.
Protection	IP67
Weight	7.8 lbs. (3.54 kg)
Operating Temperature	-40 to 70 °C (-40 to 158 °F) There is derating for input less than 17V, see figures 3.1 and 3.2.
StorageTemperature	-50 to 90 °C (-58 to 194 °F)

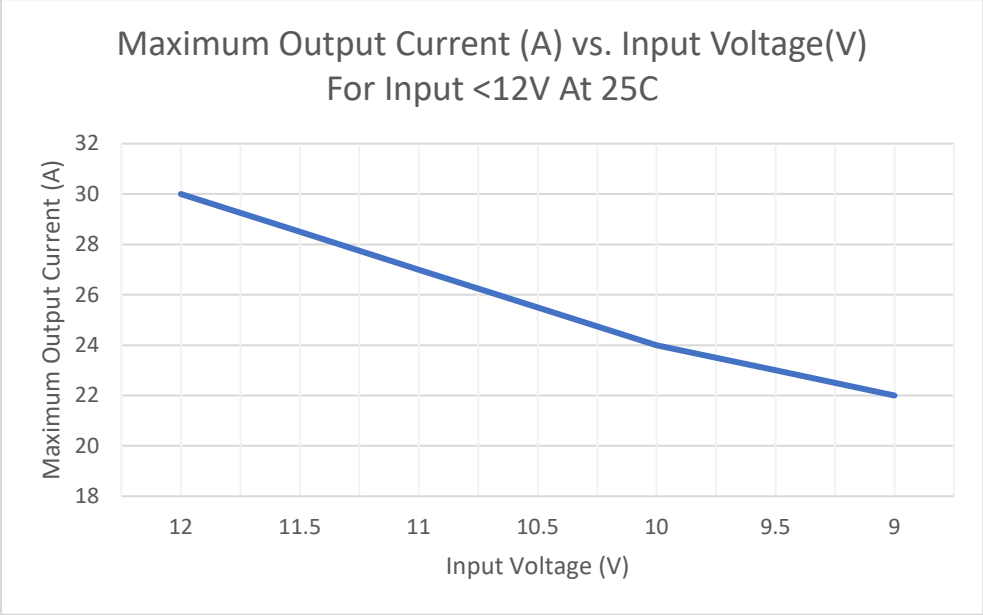

Figure 1. 0. – Output Current vs. Input Voltage

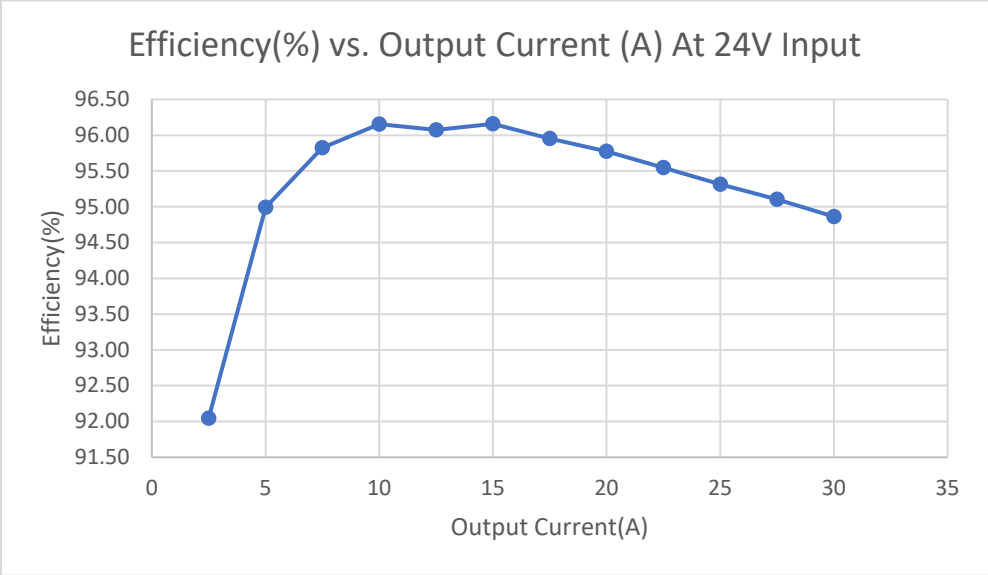

Figure 2. 0. – Power Efficiency vs. Output Current

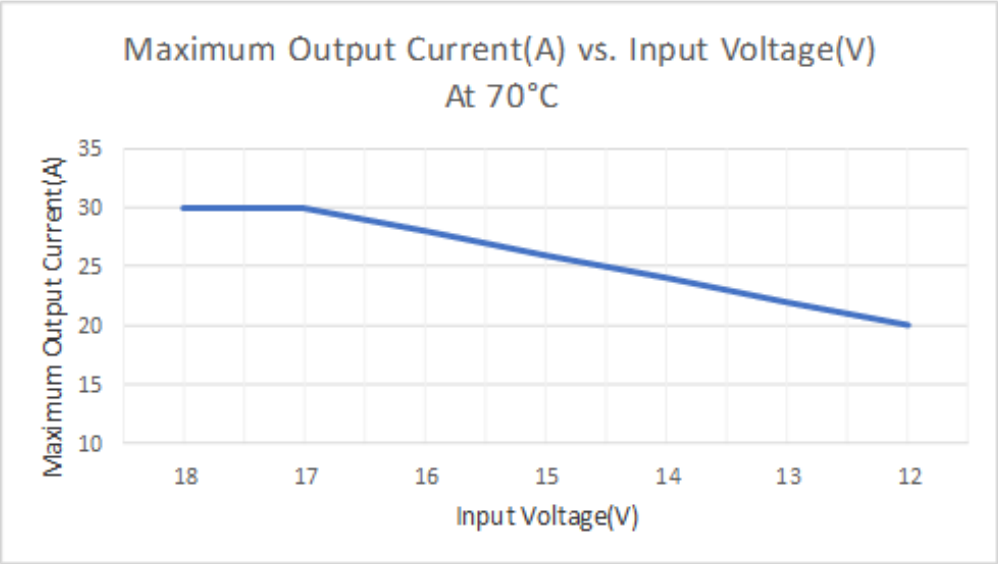

Figure 3. 1. – Maximum Output Current vs. Input Voltage At 70°C

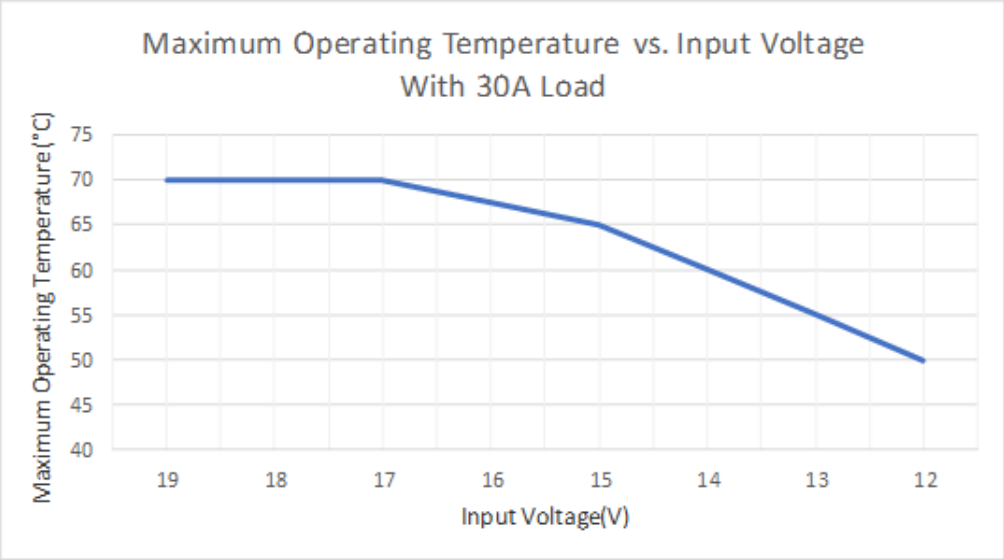

Figure 3.2. – Maximum Operating Temperature vs. Input Voltage With 30A Load

<table>
<tr><td>Electrical Pinout</td><td>

P/N: DT13-12PA



Input:
12 pin connector (TE Deutsch P/N: DT13-12PA)

<u>Connector Pin out:</u>
Pin 4: Voltage Input +
Pin 5: Voltage Input +
Pin 6: Voltage Input +
Pin 7: Voltage Input +
Pin 8: Voltage Input +
Pin 9: Voltage Input +

Pin 1: Voltage Input -
Pin 2: Voltage Input -
Pin 3: Voltage Input -
Pin 10: Voltage Input -
Pin 11: Voltage Input -
Pin 12: Voltage Input -

Suitable for 14 AWG wire

Voltage Input- terminals connected with Voltage Output- terminals

P/N DT13-6P

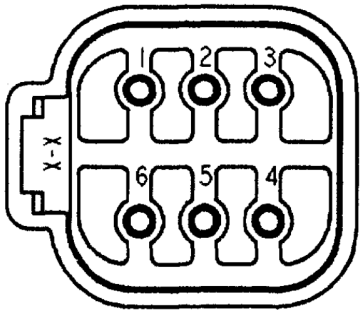

Output:
6 pin connector (TE Deutsch P/N: DT13-6P)

<u>Connector Pin out:</u>
Pin 1: Voltage Output +
Pin 2: Voltage Output +
Pin 3: Voltage Output +
Pin 4: Voltage Output -
Pin 5: Voltage Output -
Pin 6: Voltage Output -

Suitable for 14 AWG wire

</td></tr>
<tr><td>Input Mating Wire Harness</td><td>P/N: AX070158 (includesTE Deutsch P/Ns: DT06-12SA, W12S and 12 contacts 0462-201-16141 with 2m (6.5 ft.) of 14 AWG unterminated lead wires.)

It has the following wire colours and pin out. Refer to Figure 6.0.
Pins 4,5,6,7,8,9 INPUT+, 14AWG WHITE/RED
Pins 1,2,3,10,11,12 INPUT-, 14AWG WHITE/BLACK

Also available is a mating plug KIT - P/N: AX070105 (includes DT06-12SA, W12S, 12 contacts
0462-201-16141, 3 sealing plugs)</td></tr>
<tr><td>Output Mating Wire Harness</td><td>P/N: AX070154 (includes TE Deutsch P/Ns: DTP06-6S, WP6S and 6 contacts 0462-201-16141 with 2m (6.5 ft.) of 14 AWG unterminated lead wires.)

It has the following wire colours and pin out. Refer to Figure 5.0.
Pin 1 RED Voltage Output +
Pin 2 RED Voltage Output +
Pin 3 RED Voltage Output +
Pin 4 BLACK Voltage Output –
Pin 5 BLACK Voltage Output –
Pin 6 BLACK Voltage Output –</td></tr>
<tr><td>Installation</td><td>1. A 80A fuse is recommended in series with the input source.
2. Use four ¼-20 1 inch or M6 bolts screws to mount the converter.
3. Ground the unit to chassis ground by attaching to the casing a ground strap.
4. Snap the plug connector into the mating receptacle mounted on the converter.
5. Connect the wiring to power and output terminal blocks (provided by customer).
6. Once the load is ready to receive power, turn on the power source to the converter.</td></tr>
</table>

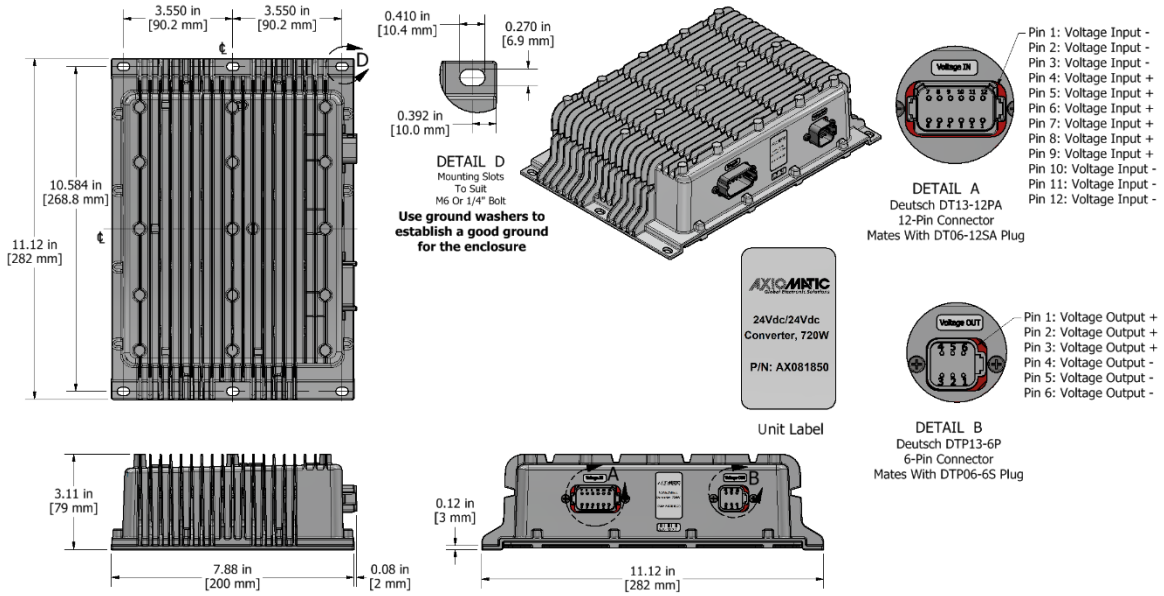

Figure 4. 0. – Dimensional Drawing

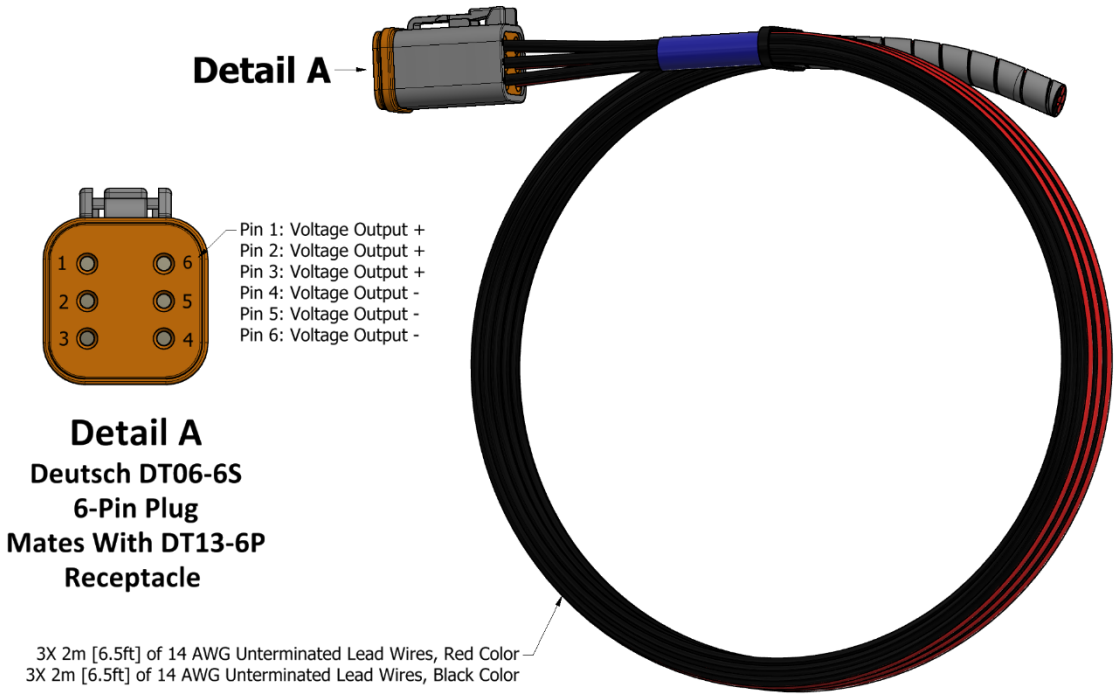

Figure 5.0 – Drawing of Wire Harness AX070154

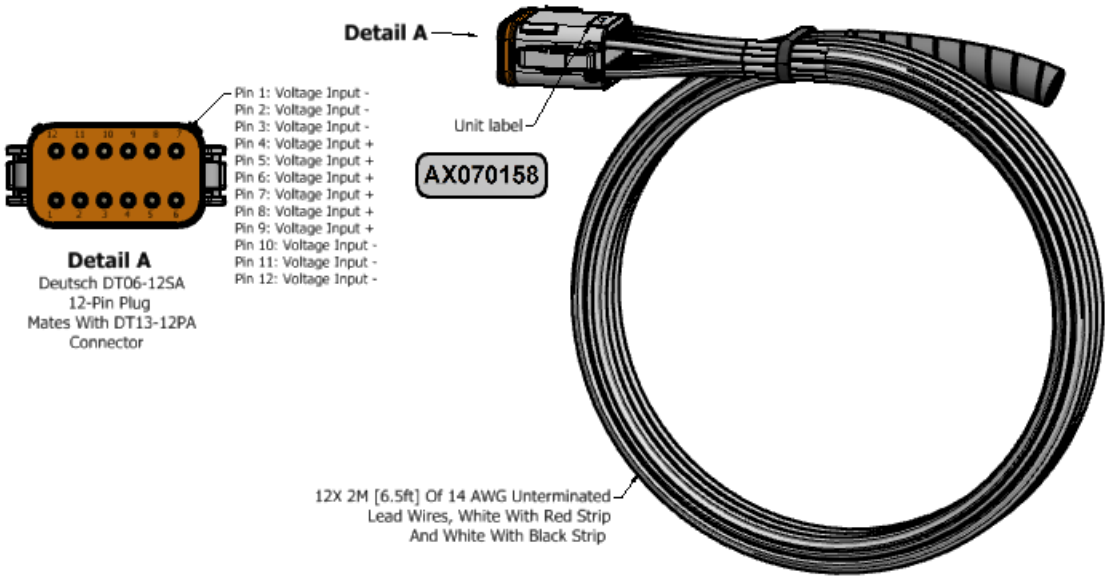

Figure 6.0 – Drawing of Wire Harness AX070158

Form: TDAX081850-08/17/2026

OUR PRODUCTS

AC/DC Power Supplies
Actuator Controls/Interfaces
Automotive Ethernet Switches
Battery Chargers
CAN Controls, Routers, Repeaters
CAN/WiFi
CAN/Bluetooth (Classic, BLE)
CAN bus Routers
CANopen I/O Modules
Current/Voltage/PWM Converters
DC/DC Power Converters
Engine Temperature Scanners
Ethernet/CAN Converters, Gateways
Ethernet Switches
Fan Drive Controllers
Gateways, CAN/Modbus, RS-232
Gyroscopes, Inclinometers
Hydraulic Valve Controllers
Inclinometers, Triaxial
I/O Controls
LVDT Signal Converters
Machine Controls
Media Converters
Modbus, RS-422, RS-485 Controls
Motor Controls, Inverters
Power Supplies, DC/DC, AC/DC
PWM Signal Converters/Isolators
Resolver Signal Conditioners
SAE J1939 I/O Modules
Service Tools
Signal Conditioners, Converters
Strain Gauge CAN Controls
Surge Suppressors

OUR COMPANY

Axiomatic provides electronic machine control components to the off-highway, commercial vehicle, electric vehicle, power generator set, material handling, renewable energy and industrial OEM markets. ***We innovate with engineered and off-the-shelf machine controls that add value for our customers.***

QUALITY DESIGN AND MANUFACTURING

We have an ISO9001 registered R&D, electronics design and manufacturing facility in Canada.

Sales offices are in Canada, USA, Australia and Finland.

COMPLIANCE

Product compliance details can be found in the product literature and/or on axiomatic.com. Any inquiries should be sent to sales@axiomatic.com.

SAFE USE

All products should be serviced by Axiomatic. Do not open the product and perform the service yourself.

This product can expose you to chemicals which are known in the State of California, USA to cause cancer and reproductive harm. For more information go to www.P65Warnings.ca.gov.

TECHNICAL SUPPORT

Contact technical support by emailing support@axiomatic.com.

WARRANTY, APPLICATION APPROVALS/LIMITATIONS

Axiomatic Technologies Corporation reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. Users should satisfy themselves that the product is suitable for use in the intended application. All our products carry a limited warranty against defects in material and workmanship. Please refer to our Warranty, Application Approvals/Limitations and Return Materials Process at https://www.axiomatic.com/service/.

SERVICE

All products to be returned to Axiomatic require a Return Materials Authorization Number (RMA#) from rma@axiomatic.com. Please provide the following information when requesting an RMA number:

- Serial number, part number, Runtime hours, description of problem
- Wiring set up diagram, application and other comments as needed

DISPOSAL

Axiomatic products are electronic waste. Please follow your local environmental waste and recycling laws, regulations and policies for safe disposal or recycling of electronic waste.

CONTACTS

Axiomatic Technologies Corporation
1445 Courtneypark Drive E.
Mississauga, ON
CANADA L5T 2E3
TEL: +1 (905) 602-9270
FAX: +1 (905) 602-9279
www.axiomatic.com
sales@axiomatic.com
support@axiomatic.com

Axiomatic Technologies Oy
Höytämöntie 6 C
33880 Lempäälä
FINLAND
TEL: +358 10 337 5751
www.axiomatic.com
salesfinland@axiomatic.com

Axiomatic Technologies Corporation
Unit 1632
3 Lakeview Rise
Noosa Heads, QLD
AUSTRALIA 4567
TEL: +61 (0) 423 600 664
www.axiomatic.com
sales@axiomatic.com

Axiomatic Technologies Inc.
39100 Country Club Drive
Suite 400
Farmington Hills, MI
USA 48331
TEL: +1 (734) 262-8535
www.axiomatic.com
sales@axiomatic.com

Copyright 2026