
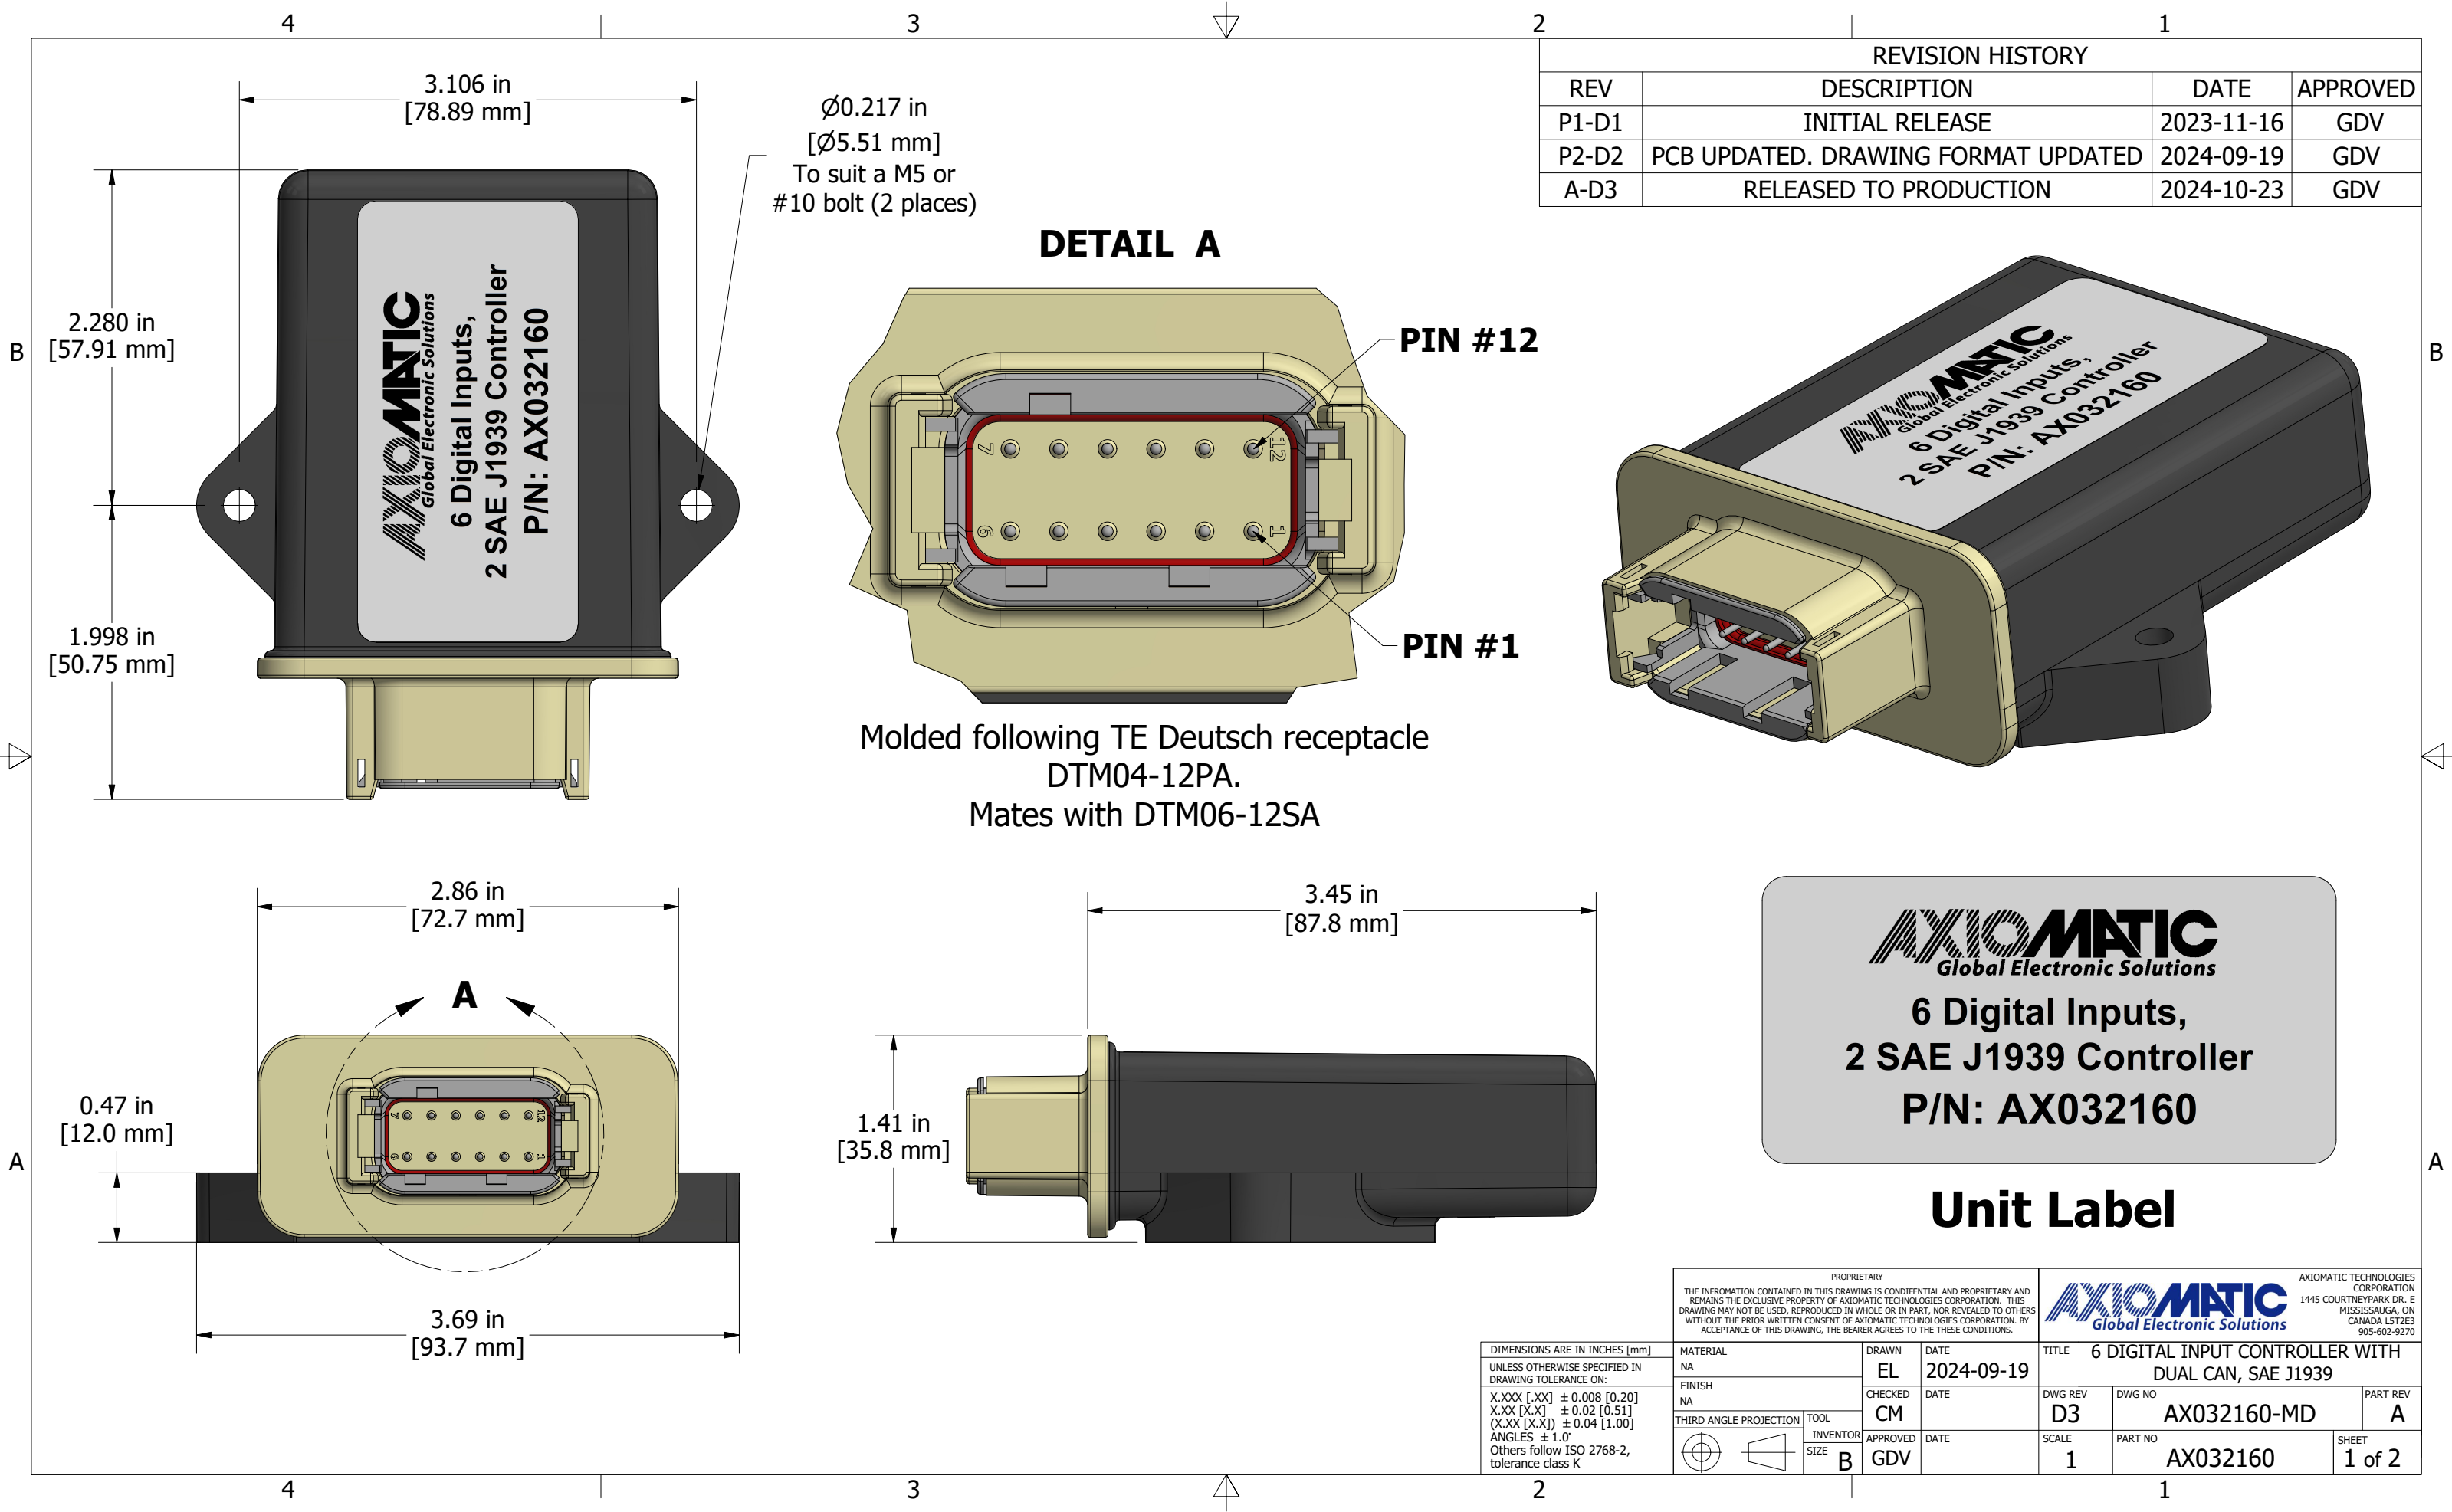




6 DIGITAL INPUT
CONTROLLER WITH
DUAL CAN, SAE J1939
PINOUT

CONNECTOR PIN ASSIGNMENT			
PIN #	FUNCTION	PIN #	FUNCTION
1	BATT+	7	CAN2_N
2	DIN2	8	CAN1_N
3	DIN4	9	DIN5
4	DIN6	10	DIN3
5	CAN1_P	11	DIN1
6	CAN2_P	12	BATT-

PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY AND REMAINS THE EXCLUSIVE PROPERTY OF AXIOMATIC TECHNOLOGIES CORPORATION. THIS DRAWING MAY NOT BE USED, REPRODUCED IN WHOLE OR IN PART, NOR REVEALED TO OTHERS WITHOUT THE PRIOR WRITTEN CONSENT OF AXIOMATIC TECHNOLOGIES CORPORATION. BY ACCEPTANCE OF THIS DRAWING, THE BEARER AGREES TO THESE CONDITIONS.				 AXIOMATIC TECHNOLOGIES CORPORATION 1445 COURTNEY PARK DR. E MISSISSAUGA, ON CANADA L5T 2E3 905-602-9270			
DIMENSIONS ARE IN INCHES [mm] UNLESS OTHERWISE SPECIFIED IN DRAWING TOLERANCE ON: X.XXX [.XX] ± 0.008 [0.20] X.XX [X.X] ± 0.02 [0.51] (X.XX [X.X]) ± 0.04 [1.00] ANGLES ± 1.0° Others follow ISO 2768-2, tolerance class K	MATERIAL NA		DRAWN EL	DATE 2024-09-19	TITLE 6 DIGITAL INPUT CONTROLLER WITH DUAL CAN, SAE J1939		
	FINISH NA		CHECKED CM	DATE	DWG REV D3	DWG NO AX032160-MD	PART REV A
	THIRD ANGLE PROJECTION 		TOOL INVENTOR SIZE B	APPROVED GDV	DATE	SCALE 1	PART NO AX032160
							SHEET 2 of 2