


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
P1-D1	INITIAL RELEASE	2020-11-27	GDV
A-D1	RELEASED TO PRODUCTION	2020-12-01	GDV
B-D2	PINOUT REMOVED	2022-02-04	GDV
B-D3	CABLE GAUGE/COLOR ADDED TO SPECIFICATIONS	2024-06-06	GDV

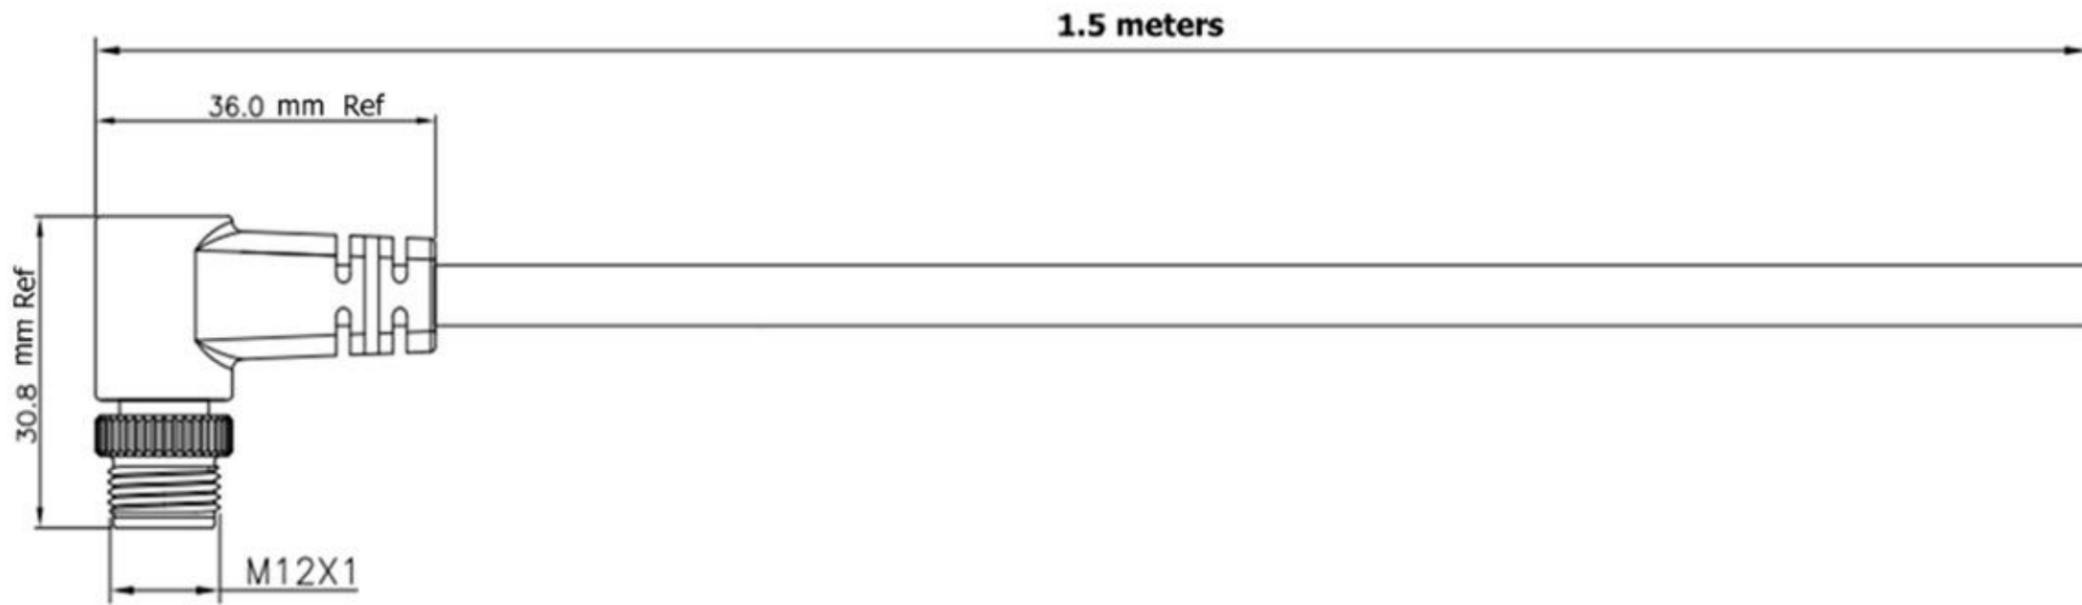

**SPECIFICATIONS:**

STANDARD: IEC 61076-2-101  
 CURRENT RATING: 4A(3, 4, 5PIN); 2A(8PIN); 1.5A(12PIN)  
 VOLTAGE RATING: 250V(3, 4PIN); 60V(5PIN); 30V(8, 12PIN)  
 CONTACT RESISTANCE: 5ohm MAX.  
 INSULATION RESISTANCE: 10M ohm MIN., DC 450V  
 OPERATING TEMPERATURE: -40°C ~ 80°C  
 IP RATING: IP67 IN LOCKED CONDITION  
 CABLE GAUGE: 26AWG  
 COLOR: BLACK

<small>PROPRIETARY</small> <small>THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY AND REMAINS THE EXCLUSIVE PROPERTY OF AXIOMATIC TECHNOLOGIES CORPORATION. THIS DRAWING MAY NOT BE USED, REPRODUCED IN WHOLE OR IN PART, NOR REVEALED TO OTHERS WITHOUT THE PRIOR WRITTEN CONSENT OF AXIOMATIC TECHNOLOGIES CORPORATION. BY ACCEPTANCE OF THIS DRAWING, THE BEARER AGREES TO THESE CONDITIONS.</small>				 <small>AXIOMATIC TECHNOLOGIES CORPORATION        1445 COURTNEY PARK DR. E.        MISSISSAUGA, ON        CANADA L5T 2E3        905-602-9270</small>			
MATERIAL NA	DRAWN EL	DATE 2020-11-27	TITLE M12 A-Coded, 12 Position Male Cable - 1.5 m (4.92') Flying Leads				
FINISH NA	CHECKED	DATE	DWG REV D3	DWG NO AX070533-MD	PART REV B		
THIRD ANGLE PROJECTION	TOOL INVENTOR SIZE B	APPROVED	DATE	SCALE Full	PART NO AX070533		
				SHEET 1 of 1			