




DETAIL B
pin assignments

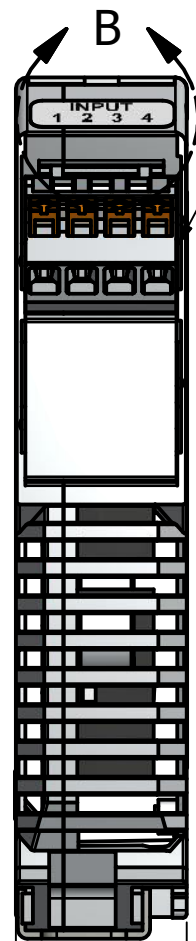

connector J1
pin 1: GND P
pin 2: VIN +
pin 3: GND P
pin 4: VIN +

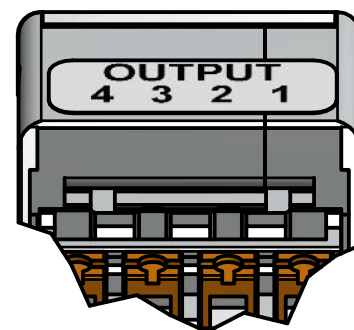

DETAIL A
pin assignments

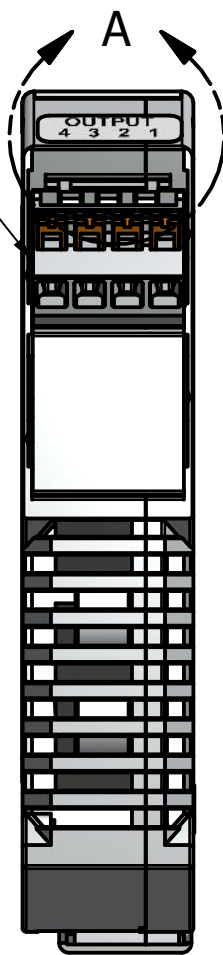

connector J2
pin 1: 120V+
pin 2: 120V+
pin 3: 120V-
pin 4: 120V-



this way **UP**
on the rail

P/N: AX083500


top label

INPUT
1 2 3 4

input label

OUTPUT
4 3 2 1

output label

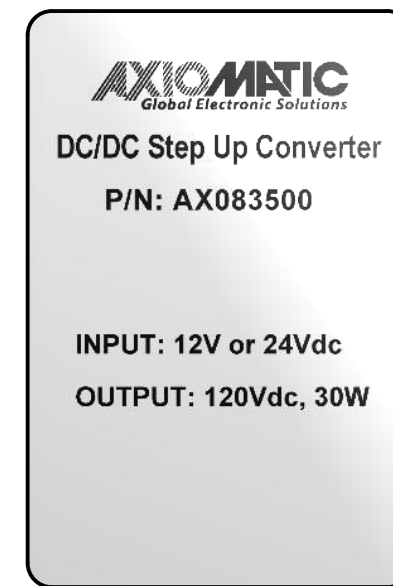


unit label

4.213 in
[107.00 mm]

0.890 in
[22.60 mm]

35 mm DIN rail
3.898 in
[99.00 mm]

TOLERANCES			
fabrication		machining	
X.XXX	+/- 0.015	X.XXX	+/- 0.005
X.XX	+/- 0.031	X.XX	+/- 0.010
X.X	+/- 0.031	X.X	+/- 0.015
fractional	+/- 0.031	fractional	+/- 0.031

PROPRIETARY				<div>AXIOMATIC TECHNOLOGIES CORPORATION</div> <div></div>			
THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY AND REMAINS THE EXCLUSIVE PROPERTY OF AXIOMATIC TECHNOLOGIES CORPORATION. THIS DRAWING MAY NOT BE USED, REPRODUCED IN WHOLE OR IN PART, NOR REVEALED TO OTHERS WITHOUT THE PRIOR WRITTEN CONSENT OF AXIOMATIC TECHNOLOGIES CORPORATION. BY ACCEPTANCE OF THIS DRAWING, THE BEARER AGREES TO THESE CONDITIONS.							
MATERIAL		DRAWN	DATE	TITLE			
polyamide		TF	3/12/2018	24VDC-120VDC step up DC Converter, 30W			
molded housing, UL94V0		CHECKED	DATE	DWG REV	DWG NO	PART REV	
				D1	AX083500-MD	1	
		APPROVED	DATE	SCALE	PART NO	SHEET	
				full	AX083500	1 of 1	