

## **Universal Input, Single Output Valve Controller (3A)**

*With Near Field Communication (NFC)*

*Configurable with Android and Apple iOS Devices and Smartphones*

**P/N: AX020710-PG9**

### **Features:**

- 1 universal signal input, user selectable as:
  - Voltage
  - Current
  - PWM
  - Frequency
  - Digital
- 1 output drives a solenoid, user selectable as:
  - proportional current 0-3 A
  - proportional voltage up to Vps
  - Digital Hotshot
  - PWM signal
  - Digital on/off
- 1 auxiliary 0-5V output feedback
- +5V Reference output;
- 12Vdc, 24Vdc nominal
- PCB assembly with four (4) 2-pin push-in terminal blocks
- Multiple LED indicators
- IP67 for metal box once cable is added
- E-Write NFC application for Android and Apple iOS devices provides configurability for application-specific input-output relationship with slope or time response.
- Protected and secure communication



### **Ordering Part Numbers:**

**AX020710-PG9** - Universal Input, Single Valve Controller (3A), NFC, 1 8-pin Screw Terminal Block, Metal Box, Strain Relief (1 PG9)

**AX020710-1.5M** - Universal Input, Single Valve Controller (3A), NFC, 1 8-pin Screw Terminal Block, Metal Box, 1.5 M Cable

**AX020710** – Universal Input, Single Valve Controller (3A), NFC, 1 8-pin Screw Terminal Block, PCB

#### Accessories:

**E-Write NFC Application** is available for Android and iOS devices (see User Interface below).

*If custom settings are requested, a unique part number will be assigned before ordering.*

### **Description**

As a highly flexible controller, it accepts one command signal input and drives a solenoid up to 3A. Many control profile parameters are user configurable. A PCB form factor is available. Operation is



Table 1.0 –User Configurable Universal Input					
Analog Input Functions		Voltage Input or Current Input			
Voltage Input		0-5 V (Impedance 110 kΩ) 0-10 V (Impedance 130 kΩ) +/- 5V (Impedance 110 kΩ) +/- 10V (Impedance 130 kΩ)			
Current Input		0-20 mA (Impedance 249 Ω) 4-20 mA (Impedance 249 Ω)			
Discrete Input Functions		Digital Input, PWM Input or Frequency Input			
Input		12-bit ADC			
Digital Input Level		Accepts 5V TTL and up to VPs Threshold: Low <1 V; High >2.2 V			
Digital Input		Active High or Active Low Amplitude: 0 to +Vps			
Input Impedance		1 MOhm High impedance 10KOhm pull down 10KOhm pull up to +6V			
PWM Input		Low Frequency (10 Hz to 1 kHz) High Frequency (100 Hz to 10 kHz) 0 to 100% D.C.			
Frequency Input		0.5 Hz to 50 Hz; 10 Hz to 1 kHz; or 100 Hz to 10 kHz 1 to 99% D.C.			
Input Accuracy		< 1%			
Input		16-bit Timer			
Maximum and Minimum Ratings					
		Characteristic	Min	Max	Units
		Power Supply	9	36	V dc
		Voltage Input	0	36	V dc
		Current Input 0(4)-20 mA	0	12	Vdc
		Digital Input	0	36	Vdc
		PWM Duty Cycle	0	100	%
		PWM Low Frequency	10	1 000	Hz
		PWM High Frequency	100	10 000	Hz
		PWM Voltage pk - pk	0	36	V dc
Frequency	0.5	10 000	Hz		

### Lookup Table Specifications

Lookup Table	<p>Can be used to create different input-to-output responses</p> <p>Ramp or Time Response</p> <p>Up to 5 Slopes/Time slots</p> <p>The user can map the Universal Input as control to the Lookup Table and configure the required slopes for the output</p>
--------------	--

### Output Specifications

Output	<p>Up to 3A</p> <p>Half-bridge, High Side Sourcing, Current Sensing, Grounded Load</p> <p>High Frequency (25 kHz)</p> <p>The user can select the following options for output using the E-Write NFC.</p> <ul style="list-style-type: none"> <li>Proportional Output Current (with current sensing) (0-3A)</li> <li>Proportional Output Voltage (up to V<sub>PS</sub>)</li> <li>Digital Hotshot</li> <li>Output PWM Duty Cycle (0-100% D.C.)</li> <li>Digital On/Off (Gnd-V<sub>PS</sub>)</li> </ul>
Configurable Parameters	Refer to Table 2.0.

Table 2.0 Configurable Output Parameters		
Parameter	Minimum Range	Maximum Range
Output Current	0A	3A
Ramp Up / Ramp Down	0ms (no ramp)	60,000ms
Dither amplitude (level)	0mA (no dither)	400mA
Current dither frequency	50Hz	500Hz
PWM frequency	1Hz	25kHz

Output Accuracy	Output Current mode $\leq 1\%$ Output Voltage mode $\leq 1\%$ Output PWM Duty Cycle mode $\leq 1\%$
Output Resolution	Output Current mode 1 mA Output Voltage mode 0.1V Output PWM mode 0.1%
Protection	Overcurrent and short circuit protection
Auxiliary Output	0-5V output is proportional to the proportional output range. Short circuit protection is provided.
Auxiliary Output Scale	20% of proportional output range
Voltage Reference	+5V, 50 mA maximum load

### General Specifications

Microcontroller	STM32F205RET6 32-bit, 512 Kbit program flash																		
Quiescent Current	34 mA @ 24Vdc																		
LED Indicator	Power, heartbeat, input fault indication and output fault indication																		
Control Logic	User configurable																		
Communications	Near Field Communication Full-duplex Data rate: 106 kbit/s Complies with ISO1443 (RF protocol), ISO13239, and ISO7816 Protected and secure configuration																		
User Interface	E-WRITE NFC Application is available for a fee from Google Play for Android devices ( <a href="https://play.google.com/store/apps/details?id=com.axiomatic.ewritenfc">https://play.google.com/store/apps/details?id=com.axiomatic.ewritenfc</a> ). E-WRITE NFC Application can be downloaded for a fee from Apple's App Store for iOS devices ( <a href="https://apps.apple.com/us/app/e-write-nfc/id6473560354">https://apps.apple.com/us/app/e-write-nfc/id6473560354</a> ).																		
Operating Conditions	-40 to 85 °C (-40 to 185 °F)																		
Dimensions	Metal Box with gasket and PG9 strain relief 114 mm x 35 mm x 89 mm (4.5 in x 1.37 in x 3.5 in) (W x D x H excluding PG9 strain relief) Refer to Figure 1.0.																		
Protection	IP00 for PCB IP67 for Metal Box once cable is added																		
Vibration	Preliminary values: MIL-STD-202G, Method 204D test condition C (Sine) and Method 214A, test condition B (Random) 10 g peak (Sine) 7.68 Grms peak (Random)																		
Shock	Preliminary values: MIL-STD-202G, Method 213B, test condition A 50g (half sine pulse, 9ms long, 8 per axis)																		
Approvals	CE marking																		
Weight	0.72 lb. (0.327 kg)																		
Electrical Connections	1 8-pin screw terminal block (Wieland P/N: 25.197.0853.0) Use 18-20 AWG wire for connection to power and solenoid. <table> <tr> <th>PIN #</th><th>FUNCTION</th></tr> <tr> <td>1</td><td>POWER -</td></tr> <tr> <td>2</td><td>POWER +</td></tr> <tr> <td>3</td><td>SOLENOID -</td></tr> <tr> <td>4</td><td>SOLENOID +</td></tr> <tr> <td>5</td><td>INPUT +</td></tr> <tr> <td>6</td><td>INPUT GND</td></tr> <tr> <td>7</td><td>AUXILIARY OUTPUT</td></tr> <tr> <td>8</td><td>+5V REFERENCE</td></tr> </table>	PIN #	FUNCTION	1	POWER -	2	POWER +	3	SOLENOID -	4	SOLENOID +	5	INPUT +	6	INPUT GND	7	AUXILIARY OUTPUT	8	+5V REFERENCE
PIN #	FUNCTION																		
1	POWER -																		
2	POWER +																		
3	SOLENOID -																		
4	SOLENOID +																		
5	INPUT +																		
6	INPUT GND																		
7	AUXILIARY OUTPUT																		
8	+5V REFERENCE																		
Mounting	Program the unit before installing in a control panel or metal box.  Mounting holes are sized for #6 or M4 bolts on the PCB Assembly P/N: AX020710.																		

The bolt length will be determined by the end-user's mounting plate thickness. The mounting flange of the controller is 0.062 inches (1.5 mm) thick. If the module is mounted without an enclosure, it should be mounted vertically with connectors facing left or right to reduce likelihood of moisture entry. All field wiring should be suitable for the operating temperature range. Install the unit with appropriate space available for servicing and for adequate wire harness access.

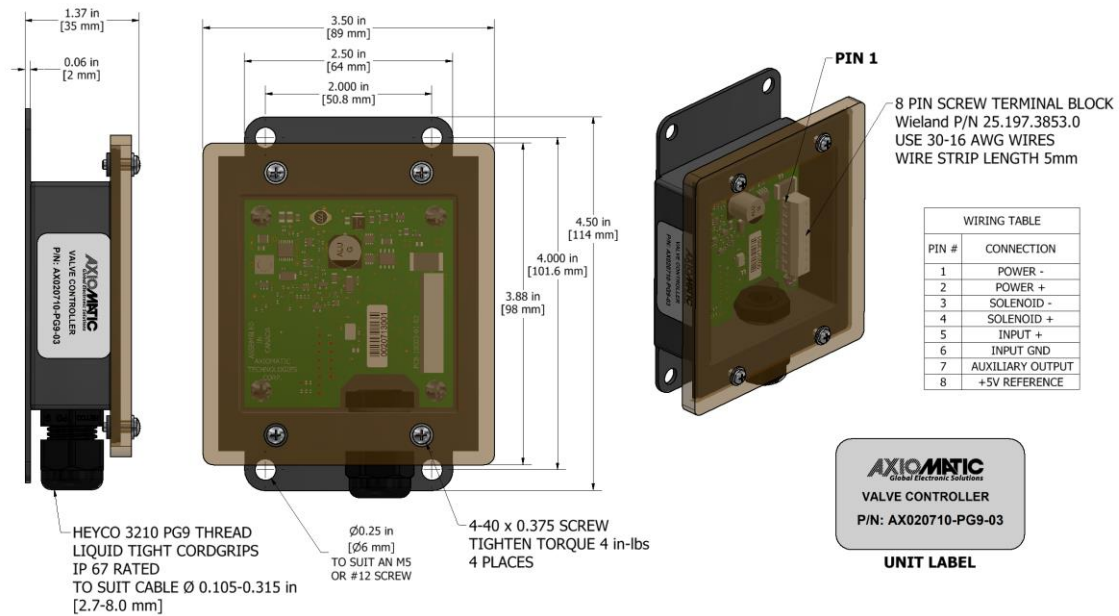


Figure 1.0. – Dimensional Drawing

Form: TDAX020710-PG9-07/24/2024