

Universal Input, Single Output Valve Controller (5A)

With Near Field Communication (NFC)

Configurable with Android and Apple iOS Devices and Smartphones

P/N: AX020720

Features:

- 1 universal signal input, user selectable as:
 - Voltage
 - Current
 - PWM
 - Frequency
 - Digital
- 1 output drives a solenoid, user selectable as:
 - Proportional current 0-5A
 - Proportional voltage up to Vps
 - Digital Hotshot
 - PWM signal
 - Digital on/off
- 1 auxiliary 0-5V output feedback
- +5V Reference output
- 12 or 24 VDC nominal
- PCB assembly with 4 2-pin push-in terminal blocks
- Multiple LED indicators
- E-Write NFC application for Android and Apple iOS devices provides configurability for application-specific input-output relationship with slope or time response.
- Protected and secure communication



Ordering Part Numbers:

AX020720 – Universal Input, Single Valve Controller, NFC, 1 8-pin Screw Terminal Block, PCB

AX020720-PG9 - Universal Input, Single Valve Controller, NFC, 1 8-pin Screw Terminal Block, Metal Box, Strain Relief (1 PG9)

AX020720-1.5M - Universal Input, Single Valve Controller, NFC, 1 8-pin Screw Terminal Block, Metal Box, 1.5 M Cable

Accessories:

E-Write NFC Application is available for Android and iOS devices (see User Interface below).

Description:

As a highly flexible controller, it accepts one command signal input and drives a solenoid up to 5 A. Many control profile parameters are user configurable. A PCB form factor is available. Operation is from -40 to 85°C. Designed to interface with 12 or 24 V battery power, it is suitable for machine and industrial applications.


Using Near Field Communication (NFC), the wireless valve controller is remotely configurable via a smartphone application. Bringing the two devices within 3 cm¹ (1 inch¹) of each other, the NFC

technology uses magnetic induction between two loop antennas to communicate within the globally available radio frequency ISM band of 13.56 MHz.

There are 3 models available: PCB Assembly (AX020720), PCB installed in a metal box with PG9 strain relief (AX020720-PG9), or a PCB installed in a metal box with 1.5 m unterminated cable (AX020720-1.5M).

¹The distance will vary with different phones.

Block Diagram

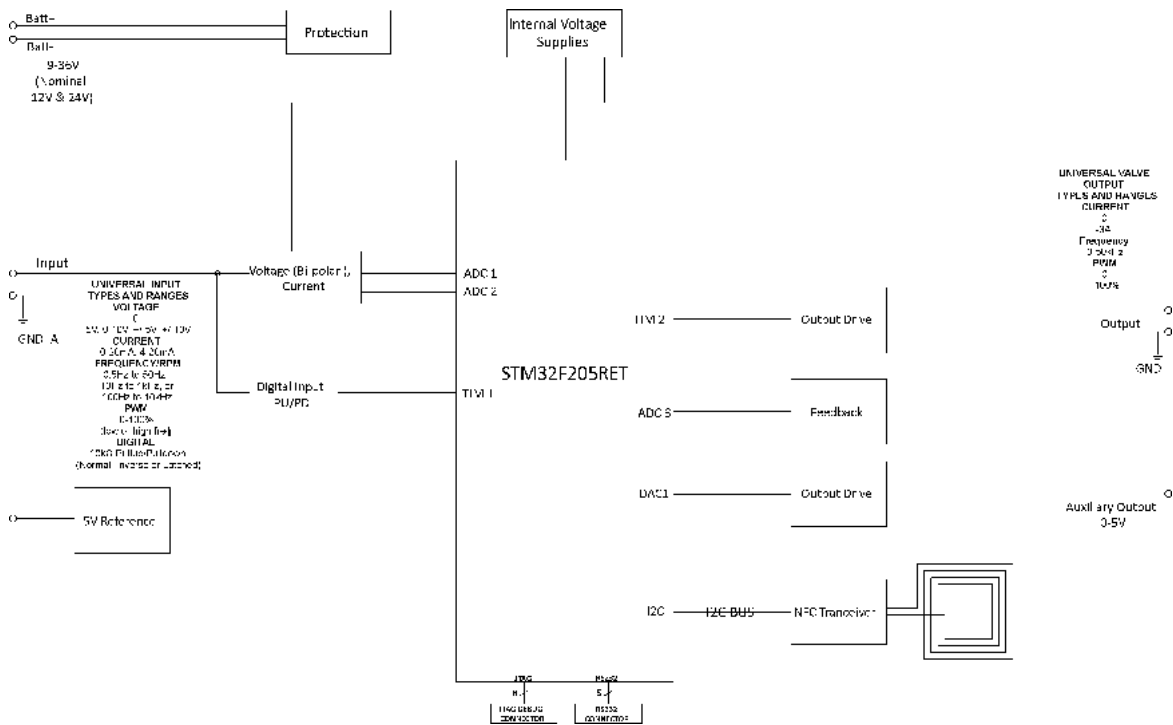

Technical Specifications

Specifications are indicative and subject to change. Actual performance will vary depending on the application and operating conditions. Users should satisfy themselves that the product is suitable for use in the intended application. All our products carry a limited warranty against defects in material and workmanship. Please refer to our Warranty, Application Approvals/Limitations and Return Materials Process as described on <https://www.axiomatic.com/service/>.

All specifications typical at nominal input voltage and 25°C unless otherwise specified.

Input Specifications

Power Supply Input - Nominal	12Vdc or 24Vdc nominal (9 to 36 VDC power supply range)
Protection	Reverse polarity protection is provided. Undervoltage protection down to 6 V is provided. Overvoltage protection up to 44.9 V is provided.
Universal Signal Input	All inputs are user selectable. Refer to Table 1.0

Table 1.0 –User Configurable Universal Input																																												
Analog Input Functions		Voltage Input or Current Input																																										
Voltage Input		0-5 V (Impedance 110 kΩ) 0-10 V (Impedance 130 kΩ) +/- 5V (Impedance 110 kΩ) +/- 10V (Impedance 130 kΩ)																																										
Current Input		0-20 mA (Impedance 249 Ω) 4-20 mA (Impedance 249 Ω)																																										
Discrete Input Functions		Digital, PWM, or Frequency Input																																										
Input		12-bit ADC																																										
Digital Input Level		Accepts 5V TTL and up to Vps Threshold: Low <1 V; High >2.2 V																																										
Digital Input		Active High or Active Low Amplitude: 0 to +Vps																																										
Input Impedance		1 MOhm High impedance 10KOhm pull down 10KOhm pull up to +6V																																										
PWM Input		Low Frequency (10 Hz to 1 kHz) High Frequency (100 Hz to 10 kHz) 0 to 100% D.C.																																										
Frequency Input		0.5 Hz to 50 Hz; 10 Hz to 1 kHz; or 100 Hz to 10 kHz 1 to 99% D.C.																																										
Input Accuracy		< 1%																																										
Input		16-bit Timer																																										
Maximum and Minimum Ratings		<table><tr><th>Characteristic</th><th>Min</th><th>Max</th><th>Units</th></tr><tr><td>Power Supply</td><td>9</td><td>36</td><td>V dc</td></tr><tr><td>Voltage Input</td><td>0</td><td>36</td><td>V dc</td></tr><tr><td>Current Input 0(4)-20 mA</td><td>0</td><td>12</td><td>Vdc</td></tr><tr><td>Digital Input</td><td>0</td><td>36</td><td>Vdc</td></tr><tr><td>PWM Duty Cycle</td><td>0</td><td>100</td><td>%</td></tr><tr><td>PWM Low Frequency</td><td>10</td><td>1 000</td><td>Hz</td></tr><tr><td>PWM High Frequency</td><td>100</td><td>10 000</td><td>Hz</td></tr><tr><td>PWM Voltage pk - pk</td><td>0</td><td>36</td><td>V dc</td></tr><tr><td>Frequency</td><td>0.5</td><td>10 000</td><td>Hz</td></tr></table>			Characteristic	Min	Max	Units	Power Supply	9	36	V dc	Voltage Input	0	36	V dc	Current Input 0(4)-20 mA	0	12	Vdc	Digital Input	0	36	Vdc	PWM Duty Cycle	0	100	%	PWM Low Frequency	10	1 000	Hz	PWM High Frequency	100	10 000	Hz	PWM Voltage pk - pk	0	36	V dc	Frequency	0.5	10 000	Hz
		Characteristic	Min	Max	Units																																							
		Power Supply	9	36	V dc																																							
		Voltage Input	0	36	V dc																																							
		Current Input 0(4)-20 mA	0	12	Vdc																																							
		Digital Input	0	36	Vdc																																							
		PWM Duty Cycle	0	100	%																																							
		PWM Low Frequency	10	1 000	Hz																																							
		PWM High Frequency	100	10 000	Hz																																							
		PWM Voltage pk - pk	0	36	V dc																																							
Frequency	0.5	10 000	Hz																																									

Lookup Table Specifications

Lookup Table	<p>Can be used to create different input-to-output responses</p> <p>Ramp or Time Response</p> <p>Up to 5 Slopes/Time slots</p> <p>The user can map the Universal Input as control to the Lookup Table and configure the required slopes for the output</p>
--------------	--

Output Specifications

Output	<p>Up to 5A</p> <p>Half-bridge, High Side Sourcing, Current Sensing, Grounded Load High Frequency (25 kHz)</p> <p>The user can select the following options for output using the E-Write NFC.</p> <ul style="list-style-type: none">• Proportional Output Current (with current sensing) (0-5A)• Proportional Output Voltage (up to Vps)• Digital Hotshot• Output PWM Duty Cycle (0-100% D.C.)• Digital On/Off (Gnd-Vps)
Configurable Parameters	Refer to Table 2.0.


Table 2.0 Configurable Output Parameters		
Parameter	Minimum Range	Maximum Range
Output Current	0A	5A
Ramp Up / Ramp Down	0ms (no ramp)	60,000ms
Dither amplitude (level)	0mA (no dither)	400mA
Current dither frequency	50Hz	500Hz
PWM frequency	1Hz	25kHz

Output Accuracy	Output Current mode $\leq 1\%$ Output Voltage mode $\leq 1\%$ Output PWM Duty Cycle mode $\leq 1\%$
Output Resolution	Output Current mode 1 mA Output Voltage mode 0.1V Output PWM mode 0.1%
Protection	Overcurrent protection Protected from short circuit to Vps or Ground
Auxiliary Output	0-5V output is proportional to the proportional output range. Short circuit protection is provided.
Auxiliary Output Scale	20% of proportional output range
Voltage Reference	+5V, 50 mA maximum load

General Specifications

Microcontroller	STM32F205RET6 32-bit, 512 Kbit program flash																		
Quiescent Current	60 mA @ 12 Vdc, 40 mA @ 24Vdc typical																		
LED Indicator	Power, heartbeat, input fault indication and output fault indication																		
Control Logic	User configurable																		
Communications	Near Field Communication Full-duplex Data rate: 106 kbit/s Complies with ISO1443 (RF protocol), ISO13239, and ISO7816 Protected and secure configuration																		
User Interface	E-WRITE NFC Application is available for a fee from Google Play for Android devices (https://play.google.com/store/apps/details?id=com.axiomatic.ewritenfc). E-WRITE NFC Application can be downloaded for a fee from Apple's App Store for iOS devices (https://apps.apple.com/us/app/e-write-nfc/id6473560354).																		
Operating Temperature	-40 to 85 °C (-40 to 185 °F)																		
Storage Temperature	-50 to 125 °C (-58 to 257 °F)																		
Dimensions	63.5 mm x 63.5 mm x 20 mm (2.5 in x 2.5 in x 0.78 in) (L x W x H) Refer to the dimensional drawing.																		
Protection	IP00																		
Vibration	MIL-STD-202H, method 204, test condition C 10 g peak (Sine component) MIL-STD-202H, method 214A, test condition I/B 7.68 Grms peak (Random component)																		
Shock	MIL-STD-202H, method 213B, test condition A 50 g peak																		
Approvals	CE / UKCA marking																		
Weight	0.05 lb. (0.023 kg)																		
Electrical Connections	1 8-pin screw terminal block (Wieland P/N: 25.197.0853.0) Use 18-20 AWG wire for connection to power and solenoid. <table border="1" data-bbox="589 1409 1040 1677"> <thead> <tr> <th>PIN #</th><th>FUNCTION</th></tr> </thead> <tbody> <tr> <td>1</td><td>POWER -</td></tr> <tr> <td>2</td><td>POWER +</td></tr> <tr> <td>3</td><td>SOLENOID -</td></tr> <tr> <td>4</td><td>SOLENOID +</td></tr> <tr> <td>5</td><td>INPUT +</td></tr> <tr> <td>6</td><td>INPUT GND</td></tr> <tr> <td>7</td><td>AUXILIARY OUTPUT</td></tr> <tr> <td>8</td><td>+5V REFERENCE</td></tr> </tbody> </table>	PIN #	FUNCTION	1	POWER -	2	POWER +	3	SOLENOID -	4	SOLENOID +	5	INPUT +	6	INPUT GND	7	AUXILIARY OUTPUT	8	+5V REFERENCE
PIN #	FUNCTION																		
1	POWER -																		
2	POWER +																		
3	SOLENOID -																		
4	SOLENOID +																		
5	INPUT +																		
6	INPUT GND																		
7	AUXILIARY OUTPUT																		
8	+5V REFERENCE																		
Mounting	Program the unit before installing it in a control panel or metal box. Mounting holes are sized for #6 or M3.5 bolts on the PCB Assembly P/N: AX020720. The bolt length will be determined by the end-user's mounting plate thickness. The mounting flange of the controller is 0.062 inches (1.5 mm) thick. If the module is mounted without an enclosure, it should be mounted vertically with connectors facing left or right to reduce the likelihood of moisture entry. All field wiring should be suitable for the operating temperature range. Install the unit with appropriate space available for servicing and for adequate wire harness access.																		

Dimensional Drawing

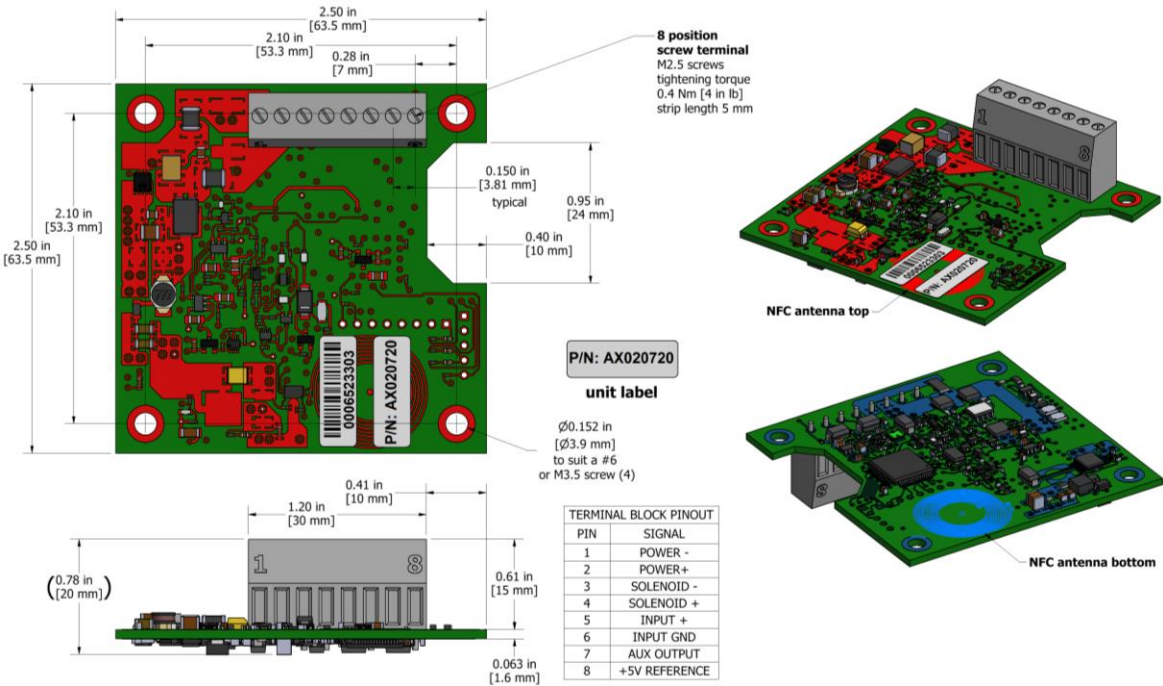

Form: TDAX020720-08/27/2024