

24V to 24V DC Converter

240 W, Isolated

P/N: AX080200K

Clean 24 VDC power in a rugged package

Features

- 24V to 24V DC Converter
- Input operating voltage range from 13 to 32VDC
- Conditioned output of 24VDC \pm 2%, 240W
- No minimum load requirement
- Switch mode operation delivers high efficiency
- Reverse polarity protection
- Output short circuit protection
- Under and over input voltage protection
- Input and output isolation
- Robust, rugged and highly reliable
- Compact size for ease of mounting in confined spaces
- Connects via a 4-pin plug
- Suitable for moist, high shock and vibration environments
- Operational from -40 to +85°C
- IP67 protection



Applications

- SCADA Systems
- Remote Terminal Units (RTU)
- Switchgear
- Motor Control Centres
- Charging/Cranking
- Battery Based Power Supply Systems
- Power Conditioning for Controls & Instrumentation utilizing
- DeviceNet or other industrial networks
- Off-Highway Equipment Control Systems
- Marine Auxiliary and Propulsion Systems

These applications are found in a variety of industries including process industries, general manufacturing, electric utilities, oil & gas, water/wastewater and mobile equipment.

Ordering Part Numbers

Converter with Wire Harness KIT: **AX080200K** (includes AX080200 Converter, AX070103 Wire Harness)

Items can also be ordered individually.

24 to 24V DC Converter, 240 W, Isolated - P/N: **AX080200**


Mating Wire Harness, 2 m: **AX070103**

Mating Plug KIT - P/N: **AX070117**


Description

The DC-DC Converter provides clean 24VDC power suitable for instrumentation and control networks or process equipment. For operation under the most harsh and demanding conditions, the unit is fully sealed and enclosed to protect against moisture, shock and vibration. Power from a battery or other source in the range of 13-32VDC is converted to a 24VDC, 10A output regulated to 2%. Input and output isolation is provided. The unit is designed with extremely rugged surge and transient suppression in addition to sustained over/under voltage protection. With a nominal nameplate rating of 240W of output power, the DC-DC Converter has a typical efficiency rated at 86%.

Block Diagram

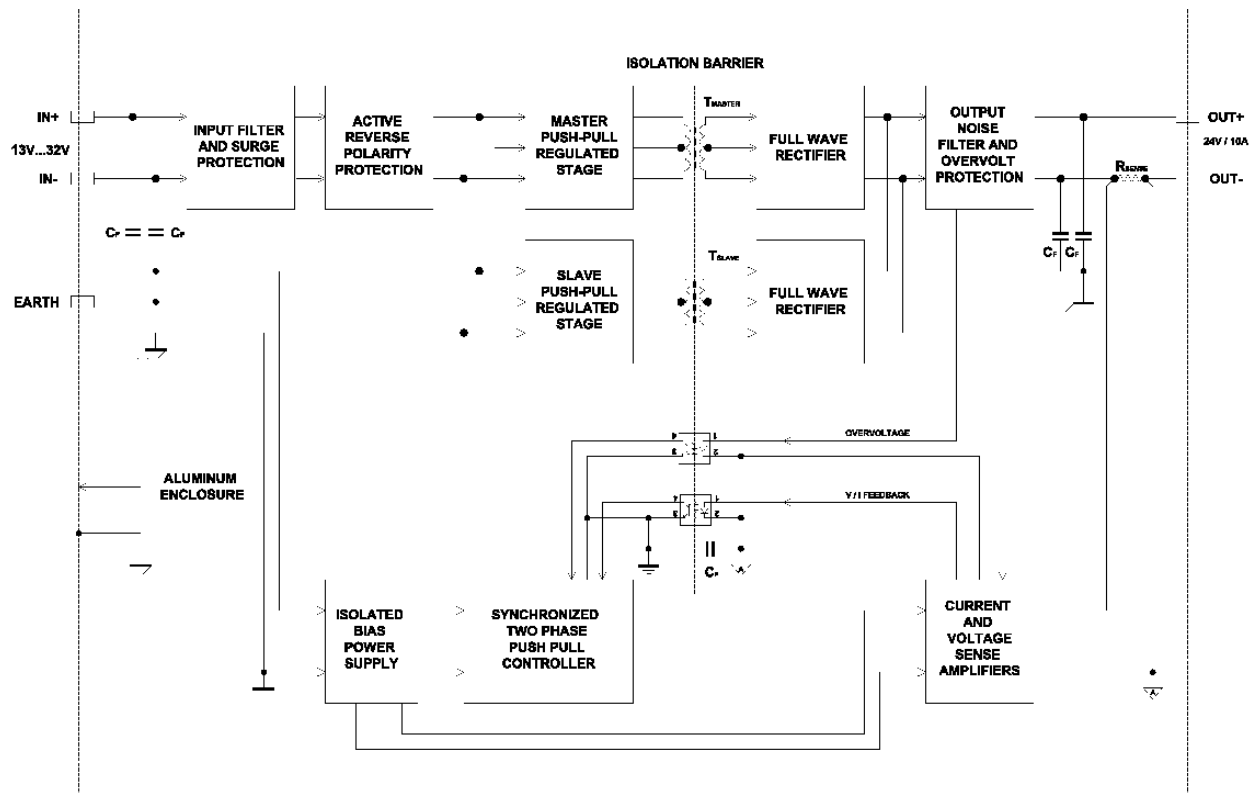

Mechanical Drawing

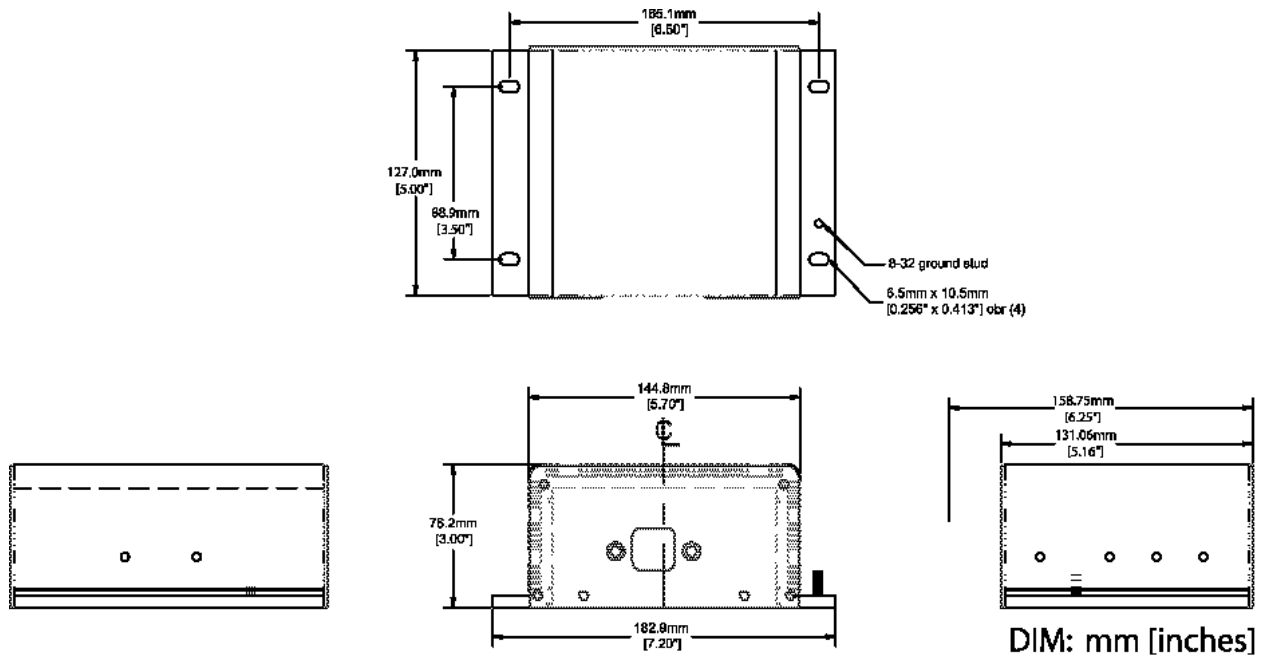


Technical Specifications

Specifications are indicative and subject to change. Actual performance will vary depending on the application and operating conditions. Users should satisfy themselves that the product is suitable for use in the intended application. All our products carry a limited warranty against defects in material and workmanship. Please refer to our Warranty, Application Limitations & Return Materials Process as described on <https://www.axiomatic.com/service/>.


Input Specifications		Output Specifications	
Power Source - Nominal	24 VDC	Nameplate Rating (Output Power)	240 Watts nominal 260 Watts maximum
Operating Voltage Range	13 - 32VDC continuous	Output Current	10A continuous (nominal) 11A maximum (in current mode)
Maximum Input Current	25 ADC	Output Voltage	24VDC \pm 2%
Reverse Voltage Protection	Provided	Output Voltage Ripple	V(RIPPLE) \leq 250 mVpp
Over-Voltage Shutdown	33VDC	Turn-On Time (with full load)	250 msec max/5% of final value
Under-Voltage Shutdown	9.5VDC	Turn-On Overshoot	None
		Stability	Stable at all loads (no minimum load requirement)
		Transient Response	200mV/1.5ms (No Load to Full Load) 100mV/1ms (50% - 100% Load)
		Short Circuit Current	Protection provided Self recovery 11A current limit

General Specifications

Isolation	Isolated from input, output and chassis ground 500V between primary and secondary
Efficiency	86% typical
Operating Temperature	-40 to 85°C (-40 to 185°F)
Storage Temperature	-50 to 85°C (-58 to 185°F)
Humidity	0-99% relative humidity (non-condensing)
Protection rating	IP65
Weight	5.84 lbs. (2.65 kg)
Electrical Connections	<p>4-pin TE Deutsch connector, P/N: DTP04-4P-L012</p> <p><u>Connector Pin out:</u> Pin 1: Input+ Pin 2: Input- Pin 3: Output- Pin 4: Output+</p> <p>Suitable wire: 12 AWG</p> <p>A mating wire harness - P/N: AX070103 is available from Axiomatic. It comprises TE Deutsch P/N: DTP06-4S, WP4S and 4x contact sockets 0462-203-12141 with 2m (6.5 ft.) of 12 AWG unterminated lead wires. It has the following wire colours and pin out. Pin 1: Red, Batt+ Pin 2: Black, Batt- Pin 3: White/Black, Output- Pin 4: White/Red, Output+</p> <p>Alternatively, a mating plug KIT - P/N: AX070117 is also available. It includes 1x socket DT06-4S, 1x wedgelock WP4S, and 4x contacts 0462-203-12141.</p>
Grounding	<p>Protective Earth (PE) must be connected to the grounding stud to reduce the risk of electric shock. The conductor providing the connection should have a ring lug and wire larger than or equal to 4 mm² (12 AWG). The ring lug should be placed between the nut and a star washer. (To secure the ground strap, use an 8-32 "K-LOK" locknut, stainless steel, 3/8" O.D.)</p> <p>All chassis grounding should go to a single ground point designated for the machine and all related equipment.</p> <p>The ground strap that provides a low impedance path for EMI should be a ½ inch wide, flat, hollow braid, no more than 12 inches long with a suitable sized ring lug for the module's grounding lug. It may be used in place of the PE grounding conductor and would then perform both PE and EMI grounding functions.</p>
Mounting	<p>Mounting ledges include holes sized for ¼ inch or M6 bolts. The bolt length will be determined by the end-user's mounting plate thickness. Typically, ¾ inch (20 mm) is adequate.</p> <p>If the module is mounted without an enclosure, it should be mounted vertically with connectors facing left and right to reduce likelihood of moisture entry.</p> <p>All field wiring should be suitable for the operating temperature range of the module.</p> <p>Install the unit with appropriate space available for servicing and for adequate wire harness access (6 inches or 15 cm) and strain relief (12 inches or 30 cm).</p>
Packaging and Dimensions	<p>Aluminum enclosure with encapsulation 7.20 x 6.25 x 3.00 inches 182.90 x 158.75 x 76.20 mm (W x L x H excluding mating connectors)</p>

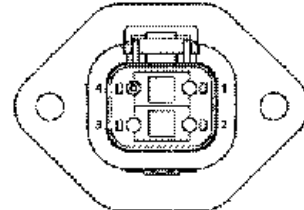

Efficiency

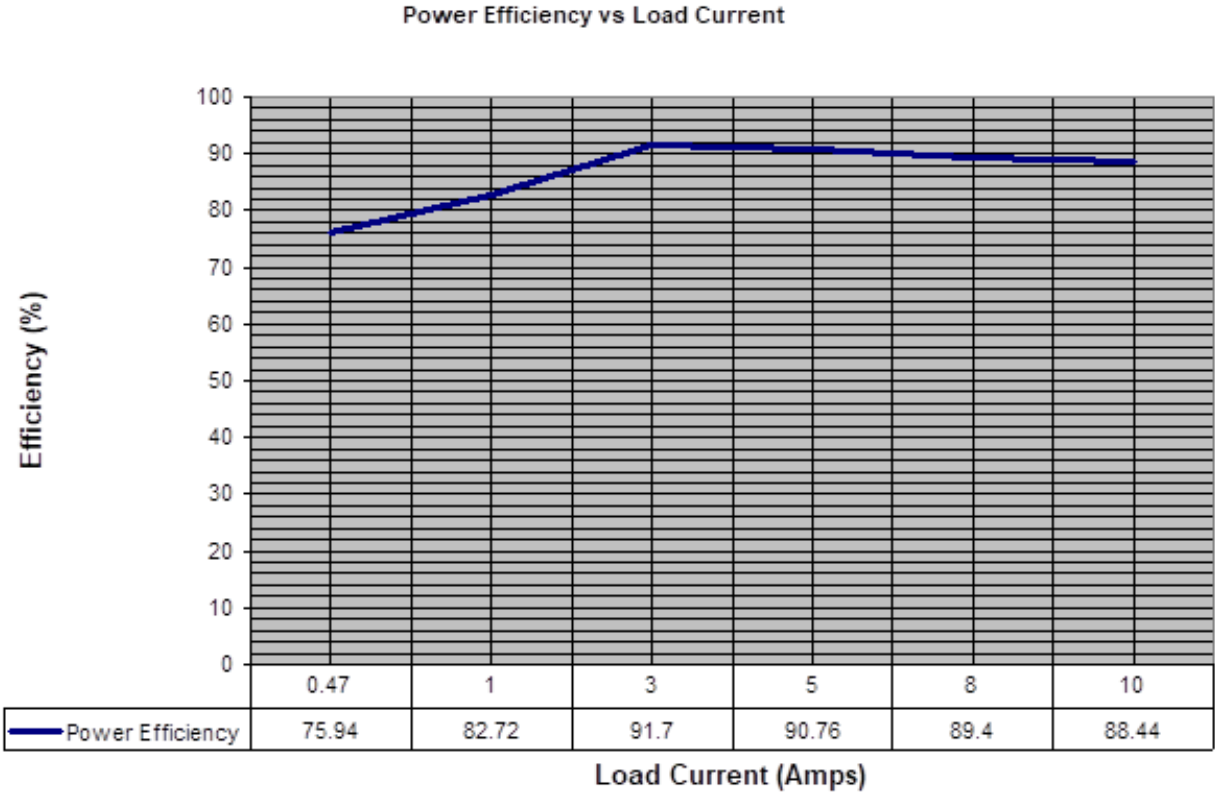

Form: TDAX080200-04/15/2025