

TECHNICAL DATASHEET #TDAX022001 Dual Output Valve Controller

1 Universal Input +5V reference CANopen®

P/N: AX022001

Features:

- 1 universal signal input
- 2 proportional or on/off outputs up to 3 A
- User programmable functionality
- 8...36VDC (12V or 24V nominal)
- +5V, 10 mA reference to power a potentiometer or low-power transducer
- 1 CANopen® port
- Aluminum enclosure with integral 12-pin connector
- IP67
- CE Marking



The Dual 3A Output Valve Controller is designed for extremely versatile control of the two proportional outputs to directly drive coils or other loads. Its flexible circuit design gives the user a wide range of configurable input or output types. The sophisticated control algorithms allow the user to program the controller for a wide range of applications without the need for custom software.

The two universal outputs can be setup to drive: proportional current (up to 3A each); hotshot digital current; proportional voltage (up to supply); proportional PWM; or straight on/off digital loads. Both outputs are high-side driven (sourcing) outputs.

The controller also has one fully programmable universal input that can be setup to read: voltage; current; resistive; frequency; or digital input signals. It also has a single +5Vref that can source up to 10mA to provide a reference for a potentiometer or low-power transducer.


The controller has a number of built-in protection features that can shut off the outputs in adverse conditions. They include hardware shutoffs to protect the circuits from being damaged as well as software shutdown features that can be enabled in safety critical systems when an input or CAN fault is detected.

The controller architecture consists of a set of internal functional blocks, which can be individually programmed and arbitrarily connected together to achieve the required system functionality for a specific application. All objects are user configurable using standard commercially available tools that can interact with a CANopen® Object Dictionary via an .EDS file.

Ordering Part Numbers:

CANopen® Dual 3A Output Valve Controller: **AX022001** EDS File, User Manual: **CD-AX022001** Accessories: **AX070105** Mating Plug Kit (DT06-12SA, W12S, 12 0462-201-16141, 3 plugs)

BLOCK DIAGRAM

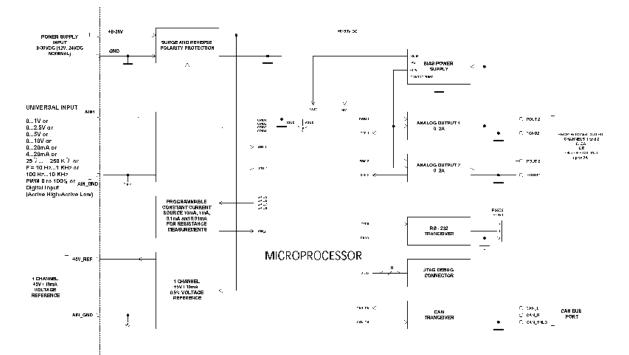

Technical Specifications:

Inputs


Power Supply Input	12V or 24V nominal (836 VDC power supply range)		
Protection	Reverse polarity protection is provided. Overvoltage protection up to 38V is provided. Overvoltage (undervoltage) shutdown of the output load is provided.		
CAN	CANopen® Command		
Universal Signal Input Refer to Table 1.0. The input is user selectable.			
Table 1.0 – Input – User S	electable Options		
Analog Input Functions	Voltage Input, Current Input or Resistive Input		
Voltage Input	0-1V (Impedance 1 MOhm) 0-2.5V (Impedance 1 MOhm) 0-5V (Impedance 200 KOhm) 0-10V (Impedance 133 KOhm)		
Current Input	0-20 mA (Impedance 124 Ohm) 4-20 mA (Impedance 124 Ohm)		
Resistive Input	25Ω to 250 kΩ		
Digital Input Functions	Discrete Input, PWM Input, Frequency Input, RPM		
Digital Input Level	5V CMOS Active High or Active Low Normal, Inverse or Latched (push-button) response		
PWM Input	0 to 100% 10 Hz to 1kHz 100 Hz to 10 kHz		
Frequency Input	10 Hz to 1kHz 100 Hz to 10 kHz		
Digital Input	Active High, Active Low		
Input Impedance	Selectable 10KOhm pull down, 10KOhm pull up to +5V		
Input Accuracy	<pre><_1% full scale error (all types)</pre>		
Input Resolution	12-bit		
Error Detection/Reaction	Out of range High and Low detection EMCY code generation (object 1003h) and fault reaction possible (object 1029h) Output(s) shutdown function can be enabled.		

Outputs

CAN	CANopen® Messages		
Output	2 Proportional or On/Off Outputs (Up to 3A) High Side Switch (sourcing output), Grounded Load Current Sensing for close-loop control, current feedback on object 2370h		
	 The user can select the following options for output using a configuration tool. Discrete Output (On/Off) Hotshot On/Off Output Current Output Current - PID loop*, with current sensing Output Voltage Output PWM Duty Cycle 		
	*Factory calibrated and user configurable		
Output Accuracy	Output Current mode \leq 2% full scale error Output Voltage mode \leq 3% full scale error Output PWM Duty Cycle mode \leq 3% full scale error		
Error Detection/Reaction	EMCY code generation (object 1003h) and fault reaction is possible (object 1029h) when an open or short circuit is detected at the output (current mode only).		
Independence	Outputs are fully independent from one another with two exceptions: a) both use the same AO Dither Frequency (object 2320h sub-index 1); b) both use the same AO Output Frequency (object 2380h sub-index 1).		
Voltage Reference	+5V, 10 mA, 0.5% Short circuit protected (current limited to 22-24 mA) Protected from connection to the power supply rail.		
Protection for Output + Terminal	Fully protected against short circuit to ground and short circuit to power supply rail. Unit will fail safe in the case of a short circuit condition, self-recovering when the short is removed.		

General Specifications

Microprocessor	32-bit, 128 KByte flash program memory			
Control Logic	Standard embedded software is provided. Refer to UMAX022001 for details. All objects are user configurable using standard commercially available tools that car interact with a CANopen® Object Dictionary via an .EDS file. <i>Application-specific control logic or factory programmed setpoints are available on</i> <i>request.</i>			
Communications	1 CAN port (CANopen®)			
	The controller's object dictionary is compatible with the CiA DS-404 device profile. In addition to the standard objects for this device profile, the controller also includes a number of manufacturer specific objects to extend the functionality beyond that of the basic profile.			
	The Axiomatic AX022001 is compliant with the following CAN in Automation (CiA) standards.			
	[DS-301]	CiA DS-301 V4.02 – CANopen® Application Layer and Communication Profile. CAN in Automation 2002		
	[DS-404]	CiA DS-404 V1.2 – Device Profile for Measurement Devices and Closed-Loop Controllers. CAN in Automation 2002		
	[DS-305]	CiA DS-305 V2.0 – Layer Setting Service (LSS) and Protocols. CAN in Automation 2006		
User Interface	Not supplied Any CANopen® service tool can act as a PC-based user interface to configure and monitor Axiomatic CANopen® products.			
Network Termination	It is necessary to terminate the network with external termination resistors. The resistors are 120 Ohm, 0.25W minimum, metal film or similar type. They should be placed between CAN_H and CAN_L terminals at both ends of the network.			
Typical Quiescent Current	11 mA @12 V 29 mA @ 24 V 21 mA @ 48 V			
Operating Conditions	-40 to 85 °C (-40 to 185 °F)			
Packaging	Aluminum enclosure, integral connector (TE Deutsch equivalent) Encapsulated Refer to the dimensional drawing.			
EMC Compliance	CE marking			
Protection	IP67 rating for the product assembly NOTE: TE Deutsch connectors are rated at IP67 for submersion (3 ft., 0.9 m).			
Weight	0.70 lb. (0.32 kg)			

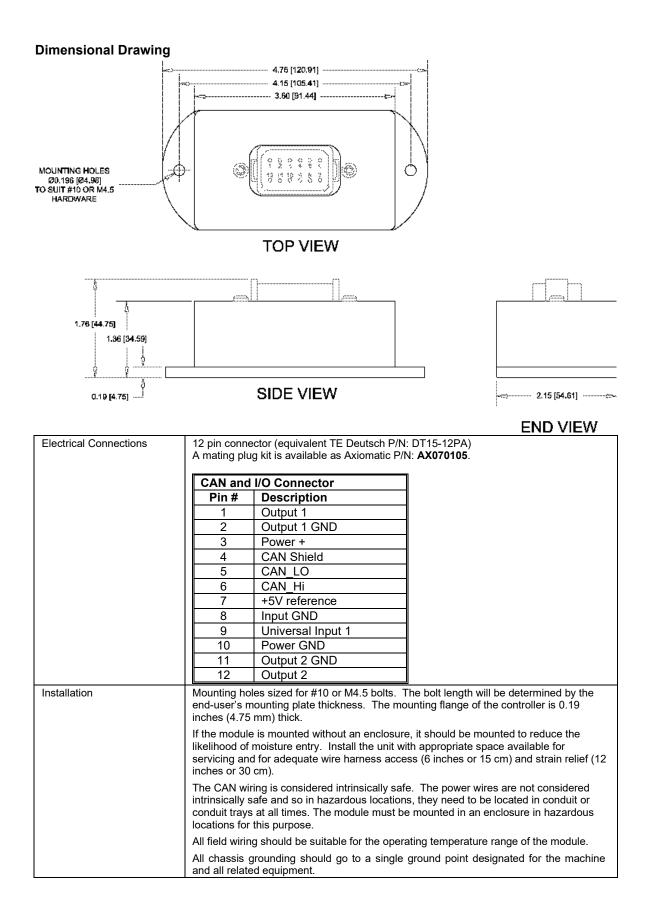

CONTROL ARCHITECTURE

The controller consists of a set of internal functional blocks, which can be individually programmed and arbitrarily connected together to achieve the required system functionality for a specific application, Each functional block is absolutely independent and has its own set of programmable parameters, or object dictionary entries. All objects are user configurable using standard commercially available tools that can interact with a CANopen® Object Dictionary via an .EDS file.

Sophisticated control algorithms allow for open or closed loop drive of the proportional outputs. It can be operated as either a self-contained control system, driving the outputs directly from the onboard inputs, and/or it can be integrated into a CANopen® network of controllers. All I/O and logical function blocks on the unit are inherently independent from one another, but can be programmed to interact in a large number of ways. Figure 1 shows the logical function blocks (software) available on the AX022001.

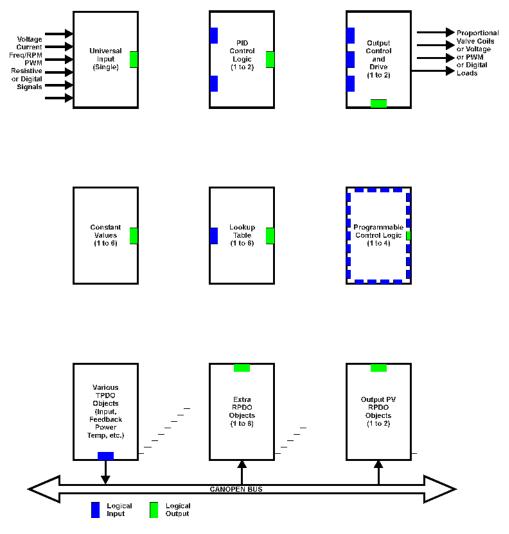


Figure 1 – Logic Functional Block Diagram

Specifications are indicative and subject to change. Actual performance will vary depending on the application and operating conditions. Users should satisfy themselves that the product is suitable for use in the intended application. All our products carry a limited warranty against defects in material and workmanship. Please refer to our Warranty, Application Approvals/Limitations and Return Materials Process as described on https://www.axiomatic.com/service/.

CANopen® is a registered community trademark of CAN in Automation e.V.